

LED B/L Specifications



Key Features

- Sunlight Readable
- LED Backlight
- 0°C~50°C
- Low Power Consumption
- High Shock & Vibration Resistance
- Low EMI Noise
- Wide Dimming
- Multiple Mounting Choices

New coming soon!



DLF/DLH1954 (AUO M190EG02 V4)

Model No.	DLF1954	DLH1954
LCD Display	19" LED Backlight LCD	19" LED Backlight LCD
Display Area	376.32 x 301.06 mm	376.32 x 301.06 mm
Brightness	1000 cd/m ²	1000 cd/m ²
Resolution	1280x1024 (SXGA)	1280x1024 (SXGA)
Contrast Ratio	900 : 1	900 : 1
Pixel Pitch (mm)	0.294(H) x 0.294(V)	0.294(H) x 0.294(V)
Viewing Angle	+80°~-80°(H), +80°~-80°(V)	+80°~-80°(H), +80°~-80°(V)
Display Colors	16.7M colors	16.7M colors
Response Time	5ms (Typical)	5ms (Typical)
Sync	LVDS	LVDS
Power Consumption	31W	36.5W
LED Driving Board	LI D19A	LI D19A
Control Board (Optional)		AD5621GA (Standard)
F / R Control Button		Power Switch, Menu, Select (+,-), Auto
OSD Menu		Brightness, Contrast, H/V Position, Color, Phase, Clock....
Dimensions (WxHxD)	396x324x16.8mm	396x324x16.8mm
Weight	2140g	2240g
Optional	☒ Touch Screen	

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.

Control Board (Optional)	AD5621GA/AD5621GD/AD5766GDVA/AD1501GDV
☒ AD5621GA	VGA+Audio
☒ AD5621GD	VGA+DVI
☒ AD5766GDVA	VGA+CVBS+S-Video+Audio (Optional DVI / Component)
☒ AD1501GDV	VGA+DVI+S-Video
F / R Control Button	5 Key / 4 Key (Optional)
☒ 5 Key	Power Switch, Menu, Select (+,-), Auto
☒ 4 Key	Power Switch, Menu, Select (+,-)

DLF= Panel+Driving Board

DLH= Panel+Driving Board+Control Board




LED B/L Specifications



Durapixel™

Outline Dimensions unit:mm

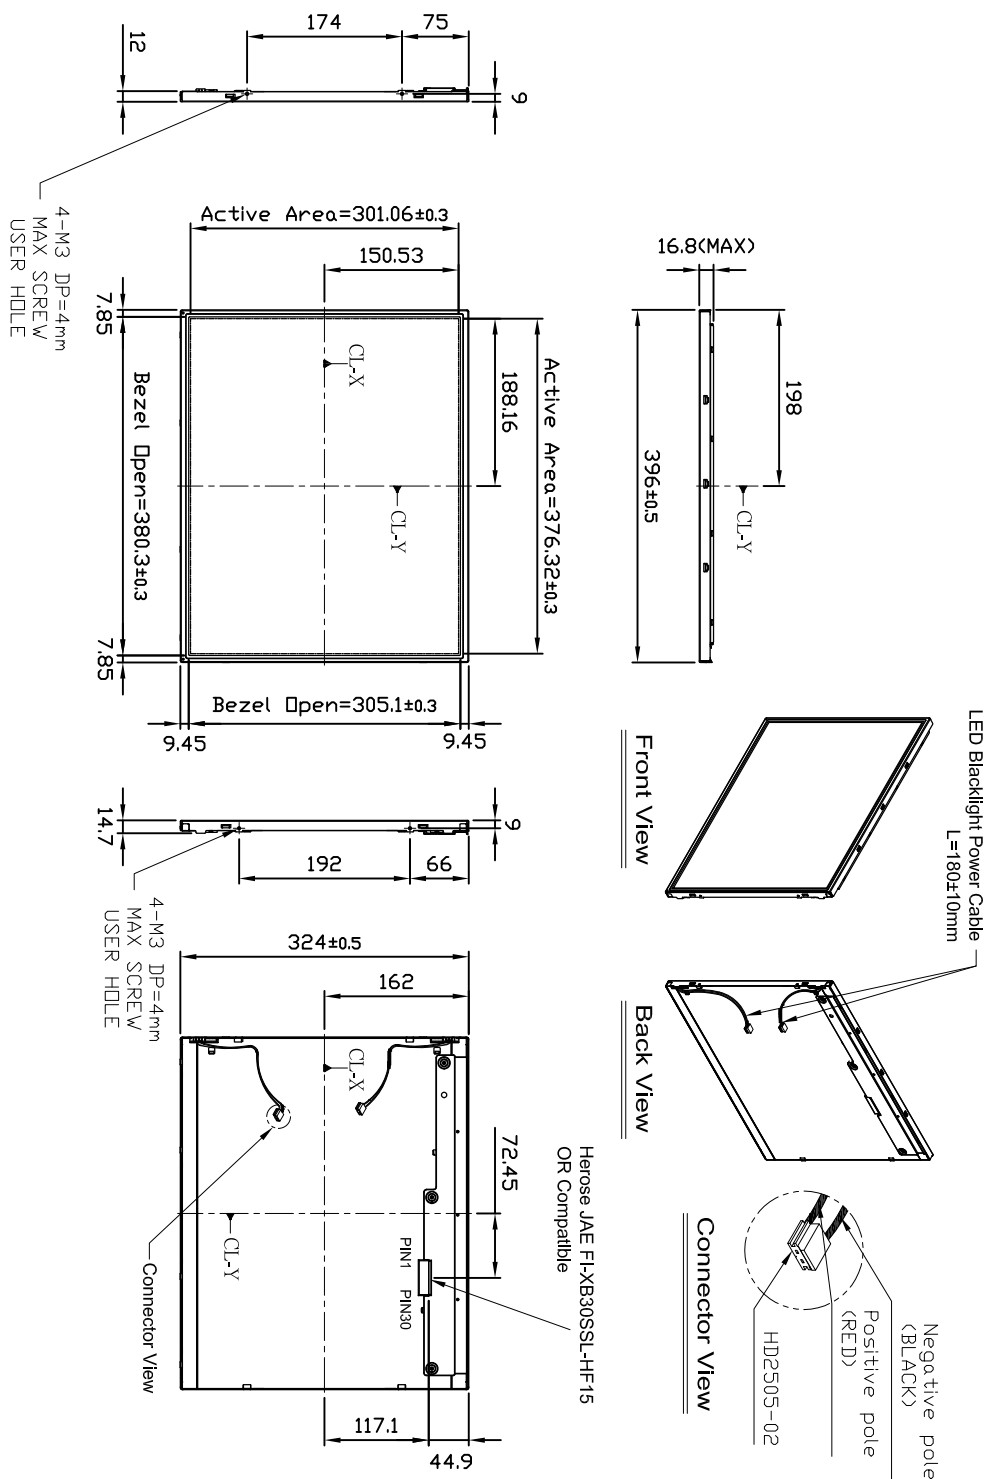

Note :

- 1.Outline Tolerance : 0.5mm
- 2.Lightbar Connector : HD2505-02
- 3.Lightbar Cable : U13239 AWG22 L=180±10mm



Enrich your visual world....