


Platform Specifications



Platform

Key Features

- Sunlight Readable
- LED Backlight
- -20°C~60°C Wide Temp.
- Low Power Consumption
- High Shock & Vibration Resistance
- 90% High Uniformity
- Low EMI Noise
- Wide Dimming
- Multiple Mounting Choices
- 70000hrs Life Expectancy



SLO/SLD1055 (CMO G104X1L01)

Model No.	SLO1055	SLD1055
LCD Display	10.4" LED Backlight LCD	10.4" LED Backlight LCD
Display Area	210.4 x 157.8mm	210.4 x 157.8mm
Brightness	800 cd/m ² (Max.1000 cd/m ²)	800 cd/m ² (Max.1000 cd/m ²)
Resolution	1024 x 768(XGA)	1024 x 768(XGA)
Contrast Ratio	1200 : 1	1200 : 1
Pixel Pitch (mm)	0.0685(H) x 0.2055(V)	0.0685(H) x 0.2055(V)
Viewing Angle	150°(H), 150°(V)	150°(H), 150°(V)
Display Colors	16.2M colors	16.2M colors
Response Time	40ms (Typical)	40ms (Typical)
Sync	LVDS x 1 Channel	LVDS x 1 Channel
Power Consumption	21.2W	21.2W
LED Driving Board	LI D12A	LI D12A
Control Board (Optional)	AD5621GA (Standard)	AD5621GA (Standard)
F / R Control Button	Power Switch, Menu, Select (+,-),Auto	
OSD Menu	Brightness, Contrast, H/V Position, Color, Phase, Clock....	
Dimensions (WxHxD)	324x254x50mm	399.9x228x54.2mm
Weight	2.2Kgs	2.72Kgs
Optional	<input checked="" type="checkbox"/> AOT <input checked="" type="checkbox"/> Touch Screen	

Specifications are subject to change without notice. All brands or product names are trademarks or registered trademarks of their respective companies.



Control Board (Optional)	AD5621GA/AD5621GD/AD5766GDVA
<input checked="" type="checkbox"/> AD5621GA	VGA+Audio
<input checked="" type="checkbox"/> AD5621GD	VGA+DVI
<input checked="" type="checkbox"/> AD5766GDVA	VGA+CVBS+S-Video+Audio (Optional DVI / Component)
F / R Control Button	5 Key / 4 Key (Optional)
<input checked="" type="checkbox"/> 5 Key	Power Switch, Menu, Select (+,-),Auto
<input checked="" type="checkbox"/> 4 Key	Power Switch, Menu, Select (+,-)

SLO= Open Frame


SLD= Industrial Casing

Platform Specifications



PlatformSS sS

SLO1055 Outline Dimensions unit:mm

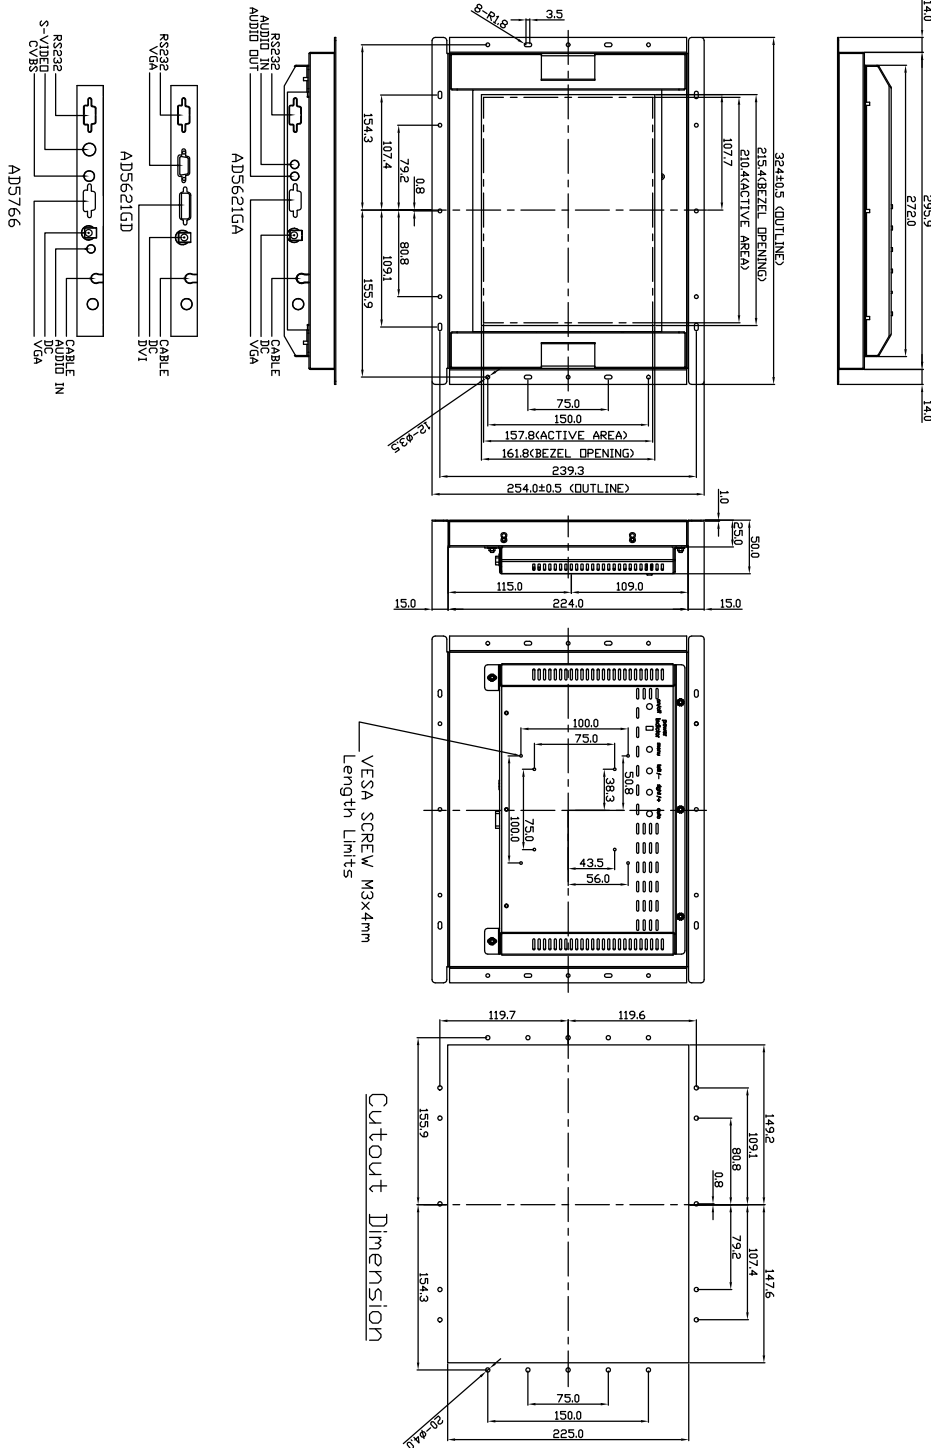


Note: 1.3 different AD boards can be selectable.
2. Tempered glass and touch screen can be installed.

Platform Specifications



Platform

SLD1055 Outline Dimensions unit:mm

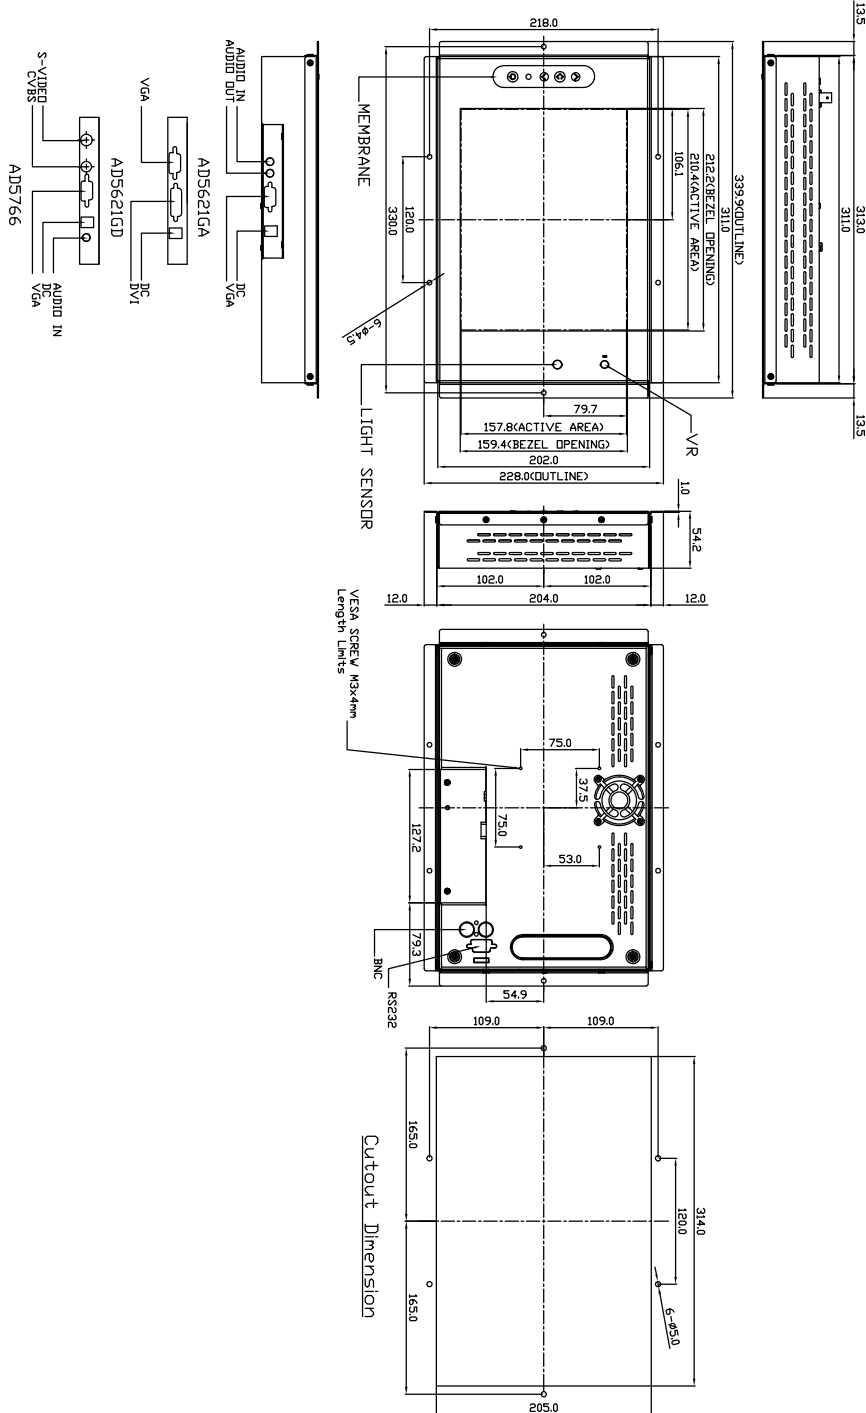

- Note:1.DSD membrane can be on front or rear cover.
- 2.4 different AD boards can be selectable.
- 3.Light sensor and VR are optional function.
- 4.Temper glass and touch screen can be installed.

