

17" Fanless Full IP65/NEMA4 Panel PC(Intel® Celeron M Platform)

Stainless Chassis

MODEL #: R17I53S-65M1




Mechanical Design




Standard:
brushed stainless



Optional:
black, high polish,
varnished coating

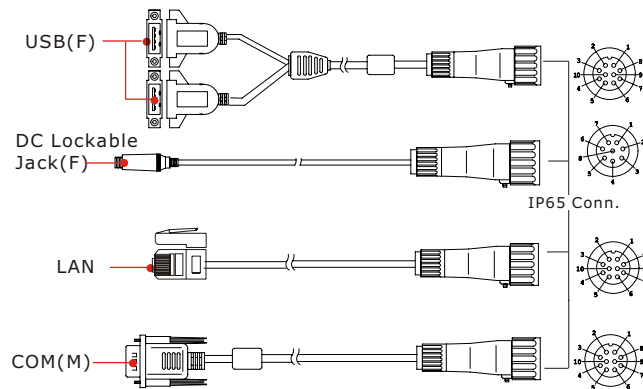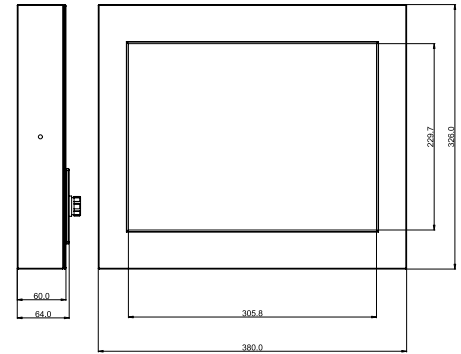

IP65 connector / cable

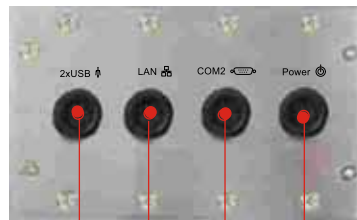

2 x USB LAN Power

Pin Define Table			
cable type	10pin conn.		D-Sub 9Pin
	Pin No.	Symbols	Pin No. Symbols
RS232	1	DCD-CON2	1 DCD-CON2
	2	DSR-CON2	6 DSR-CON2
	3	RXD-CON2	2 RXD-CON2
	4	RTS-CON2	7 RTS-CON2
	5	TXD-CON2	3 TXD-CON2
	6	CTS-CON2	8 CTS-CON2
	7	DTR-CON2	4 DTR-CON2
	8	RI-CON2	9 RI-CON2
	9	GND-CON2	5 GND-CON2
	10	NC	10 NC

Pin Define Table			
cable type	8pin conn.		DS-026 DC Jack
	Pin No.	Symbols	Pin No. Symbols
POWER	1	VCC	1 VCC
	2	VCC	1 VCC
	3	GND	2 GND
	4	GND	2 GND
	5N	C	
	6N	C	
	7	GND	2 GND
	8	GND	2 GND

Pin Define Table					
cable type	10pin conn.		A Type Female		A Type Female
	Pin No.	Symbols	Pin No.	Symbols	Pin No. Symbols
USB	1	VCC	1	VCC	
	3D	-	2	D-	
	5D	+	3	D+	
	7	GND	4	GND	
	9N	C			
	2	VCC			1 VCC
	4D	-			2 D-
	6D	+			3 D+
	8	GND			4 GND
	10	NC			

Pin Define Table				
cable type	10pin conn.		US PLUG 8P8C 3U*	
	Pin No.	Symbols	Pin No.	Symbols
LAN	1		1	
	2		2	
	3		3	
	4		4	
	5		5	
	6		6	
	7		7	
	8		8	
	9	NC 	9	NC
	10	NC 	10	NC

* Note: this is a simplified drawing and some components are not marked in detail. Please contact our sales representative if you need further product information.

System Specifications

TFT Characteristics :

- Resolutions : 1280x1024
- Brightness : 300cd/m² (typ.)
- Contrast Ratio : 800 : 1(typ.)
- Viewing Angles : -80~80(H);-80~80(V)
- Max Colors : 16.7M

SBC Specifications :

- Processor : Intel Celeron M 1.0 GHz
- BIOS : Award 4Mbit Flash
- System Chipset : Intel 855GME + ICH4
- Memory Slot : 1 x SO-DIMM, Max 1GB DDR200/266/333
- Graphic Chipset : Intel 855GME Integrated (64MB shared)
- IDE : 1 x 44pin IDE (UDMA 33/66/100)
- KB/Mouse : 2 x PS/2
- Ethernet : 2 x RJ-45
- Audio : Built in AC97 codec
- USB : 4 x USB2.0 (3 x USB internal)
- Serial : 4 x RS232 (3 x RS232 internal)
- Expansion Slot : 1 x Mini PCI (internal)
- SSD Interface : 1 x Type I/II CF socket (Internal)
- Power Input : DC-IN (Lockable, Power Jack)
- Certification : CE, FCC, RoHS

* A customized housing is needed if you would like to have the PCI expansion.

Power Specifications :

- Power Input : 12V DC IN (Lockable Power Jack)
- Power Consumption : 65W (typ.)(Max.backlight & high CPU load)

Accessories :

- External Power Supply 90W w/power cord

Environment Considerations :

- Operating Temperature : 0 deg.C to 45deg.C
- Operating Humidity : 30% to 90% (non condensing)

Input/ Output Connectors :

- Ethernet LAN : 1 X RJ45-10/100/1000 Mbps
- COM : 1 X RS232
- USB : 2 x USB Type-A Receptacle
- Power : 1 X 12VDC

Order Options :

SBC	PANEL PC
RAM : 512 MB DDR(Optional) 1 GB DDR(Optional)	Mechanical : Stainless Chassis
Storage : 2.5"80 GB HDD* 1 GB Compact Flash(Optional)	Touch : 5 Wires Resistive(Optional)
	OS : Windows XPE(Optional) Windows XP (Optional) Linux(Optional)
* Default	



Rev.	Reasons	Revised Date
1.0	New Add	Dec-01-08
1.1	Spec Change	Dec-02-08
1.2	Drawing Change	Dec-03-08

Note: All Specifications are subject to change without prior notice!

Revised Date:12/03/2008