

# Digital Signage Player

Extreme Performance Signage Player

## SI-58

Designed for Signage Solution



### Features

- Up to 8 Display outputs. 2nd Generation Intel® Core™ processor
- Discrete 480 Cores GPU
- 1024MB GDDR5-1600 Graphic Memory
- Supports DDR3 1600MHz memory, up to 8GB
- Express Card slot and dual mPCIe(x1) slots
- Dual RS232 serial port
- Slim and compact design

### System

System Mainboard	IB958
CPU Type	2nd Generation Intel® Core™ i7 / i5 / i3 Mobile Processor
CPU Socket	FCPGA988
Chipset	Intel® QM67 Express Chipset
Memory	DDR3-1600 Max. 8GB
Discrete Graphics	Ports 3~8: • AMD E6760 GPU (480 Cores @ 600 MHz; 31W) w/ 1024MB GDDR5-1600 (57.6 GB/s) • 128-bit wide, 1.DirectX®11GB GDDR5, 51.2 GB/s • DirectX®11, Shader 5.0, OpenGL 4.1 capable • UVD3 video & display engines for HD, Blu-ray & 3D
Integrate Graphic	Ports 1~2: • Intel® HD Graphics 3000 w/ i5 & i7 CPU • Intel® HD Graphics 2000 w/ i3 CPU
LAN	1x Intel® 82579LM Gigabit LAN controller (w/ iAMT 7.0) 1x Intel® 82579V Gigabit LAN controller
Expansion Slots	2x mPCIe(x1) slots for WiFi + Bluetooth options 1x Express Card slot for 3G module
I/O Interface	8x HDMI ports (2 with audio output) 3x USB 2.0 ports 2x RJ45 for Gigabit LAN 2x RJ45 for RS232 serial port 2x Microjack audio connectors for Line-in & Line-out 1x Power button 1x Mini Din 12V DC Jack
Watchdog Timer	256 segments, 0, 1, 2...255 (sec/min)
Power Requirement	+12V DC-in
Construction	Aluminum
Weight	TBD
Chassis Color	Black & White
Storage	1x External Removable 2.5" HDD drive bay
Power Supply	150W power adaptor
Mounting	Slim design with wall mounting holes
Dimensions	275mm(W) x 275mm(D) x 28mm(H)




### Mechanical and Environmental

Operating Temperature	0°C ~ 45°C (32°F ~ 113°F)
Storage Temperature	-20° ~ 80°C (-4°F ~ 176°F)
Relative Humidity	5~90% @ 45°C, (non-condensing)
Vibration	CFD: 5 grms / 5~500Hz / random operation HDD: 0.25 grms / 5~500Hz / random operation

### Ordering Information

SI-58-2510	Signage System w/ Intel® 2nd Gen Core™ i5 2510E 2.5GHz, w/ AMD HD6760 GPU, 4GB RAM, 160GB HDD, 150W power adaptor
SI-58M	Signage System w/ AMD HD6760 & 150W power adaptor, w/o CPU/RAM/HDD

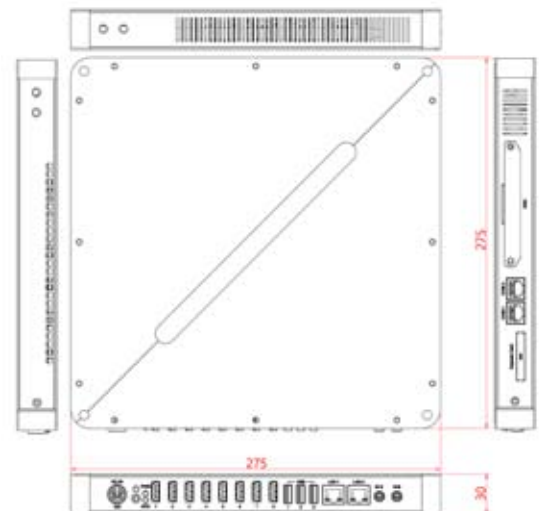

Remarks:

\* Specifications are subject to change without prior notice.