



SLO 1581

15" Open Frame LCD Display, 250 nits, XGA


SLO 1581 open frame LCD display, AOT optical bonding, touch screen capable, and customized mechanical design; fulfill the demand for extreme environments. It offers the best visibility, performance and cost effective value. The monitor brings remarkable display quality, and guaranteeing product life cycle longevity, stability, and reliability. Perfectly suitable for kiosk, ATM, POS, transportation, and outdoor industrial application.

Key Features

- High Contrast Ratio
- High Uniformity
- Fast Response Time
- Thin and Light

Applications

Transportation
Industrial

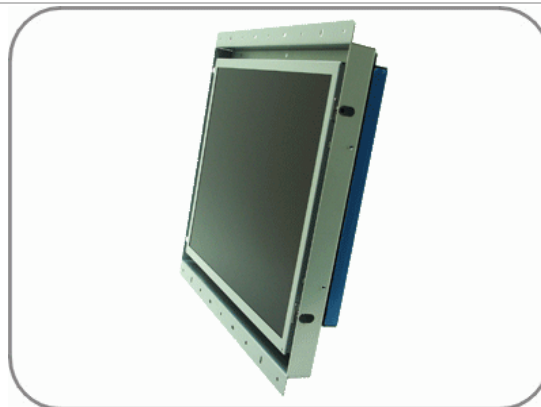

Specifications

V1

Model No.	SLO1581
Description	15" Open Frame LCD Display, 250 nits, XGA
Display Area (mm)	304.128 x 228.096 mm
Brightness	250 cd/m ²
Resolution	1024x768 (XGA)
Contrast Ratio	600 : 1
Pixel Pitch (mm)	0.297(H) x 0.297(V)
Viewing Angle	160°(H), 160°(V)
Display Colors	16.7M colors
Response Time (Typical)	8ms (Typical)
Power Input	DC 12V
Power Consumption	28W
Dimensions (mm)	352x319.4x46.8
Weight (Net)	3.42kg
Control Board (Optional)	☐ AD5621GA ☐ AD5621GD ☐ AD5766GDVA ☐ AD2662GDVAR
☐ AD5621GA	VGA + Audio
☐ AD5621GD	VGA+DVI
☐ AD2662GDVAR	VGA+DVI (Optional S-Video/ Component / Audio)
F / R Control Button	☐ 5 Key ☐ 4 Key
☐ 5 Key	Power Switch, Menu, Select (+,-), Auto
☐ 4 Key	Power Switch, Menu, Select (+,-),
OSD Menu	Brightness, Contrast, H/V Position, Color, Phase, Clock...
Optional	☐ AOT ☐ Touch Screen ☐ Waterproof

Specifications are subject to change without notice.

All brands or product names are trademarks or registered trademarks of their respective companies.



Unit:mm





Ordering Information

Part Number	Description
SLO1581-SNB-A01	15",250nits,XGA,O/B,AD5621G.12VDC,v01

Optional Accessories

Part Number	Description