



SLO 1981

19" Open Frame LCD Display, 300 nits, SXGA

SLO 1981 open frame LCD display, AOT optical bonding, touch screen capable, and customized mechanical design; fulfill the demand for extreme environments. It offers the best visibility, performance and cost effective value. The monitor brings remarkable display quality, and guaranteeing product life cycle longevity, stability, and reliability. Perfectly suitable for kiosk, ATM, POS, transportation, and outdoor industrial application.

Key Features

- High Contrast Ratio
- High Uniformity
- Fast Response Time
- Thin and Light

Applications

Transportation
Industrial



Specifications

V2

Model No.	SLO1981
Description	19" Open Frame LCD Display, 300 nits, SXGA
Display Area (mm)	376.32 x 301.056 mm
Brightness	300 cd/m ²
Resolution	1280x1024 (SXGA)
Contrast Ratio	1000 : 1
Pixel Pitch (mm)	0.294(H) x 0.294(V)
Viewing Angle	170°(H), 160°(V)
Display Colors	16.7M colors
Response Time (Typical)	5ms (Typical)
Power Input	DC 12V
Power Consumption	59W
Dimensions (mm)	424.8x388.4x52.5
Weight (Net)	5.11kg
Control Board (Optional)	☐ AD5621GA ☐ AD5621GD ☐ AD5766GDVA ☐ AD2662GDVAR
☐ AD5621GA	VGA + Audio
☐ AD5621GD	VGA+DVI
☐ AD2662GDVAR	VGA+DVI (Optional S-Video/ Component / Audio)
F / R Control Button	☐ 5 Key ☐ 4 Key
☐ 5 Key	Power Switch, Menu, Select (+,-), Auto
☐ 4 Key	Power Switch, Menu, Select (+,-),
OSD Menu	Brightness, Contrast, H/V Position, Color, Phase, Clock...
Optional	☐ AOT ☐ Touch Screen ☐ Waterproof

Specifications are subject to change without notice.


All brands or product names are trademarks or registered trademarks of their respective companies.



Mechanical Drawing

Outline Dimensions

Unit:mm

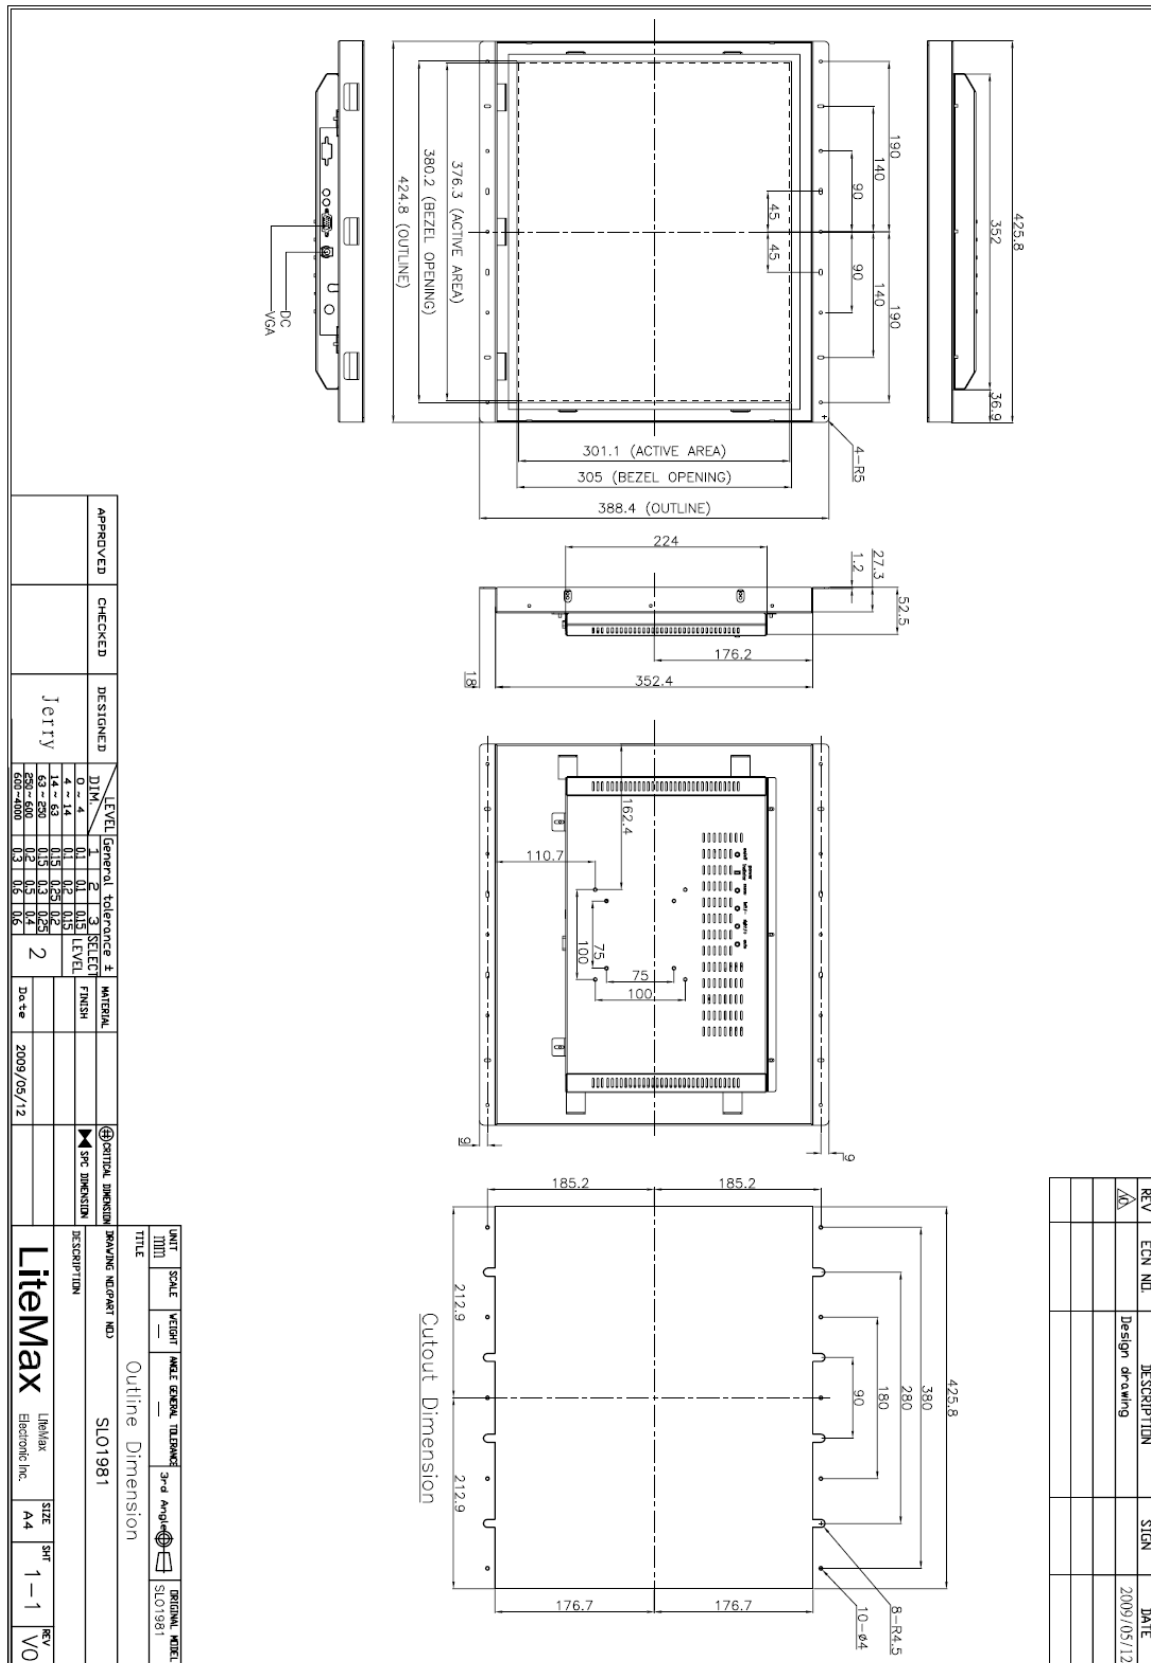



Ordering Information

Part Number	Description
SLO1981-SNB-A01	19",300nits,SXGA,O/B,AD5621G.12VDC,v01

Optional Accessories

Part Number	Description