



ONYX-322

22" Slim Medical TFT Display

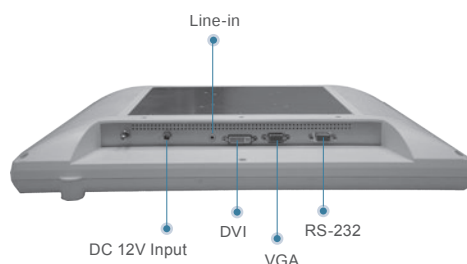

Features

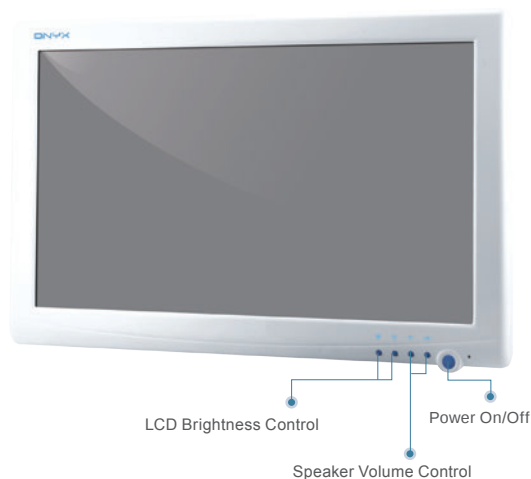

- ♦ 22" True Color Full HD Medical LCD
- ♦ 5-wire Resistive Touch Screen(Optional)
- ♦ Build-in 3-watt Speakers
- ♦ High Definition Medical Display for Micro-Surgery & Scope Application
- ♦ CE/FCC Class B, EN/UL60601-1 Medical Certification



Specifications

Display


Size	22"
Resolution	Full HD 1920 x 1080
Max. Colors	16.7M
Luminance	300 nits
View Angle	170°(H)/160°(V)
Contrast Ratio	1000:1
Back Light Life Time	50,000 Hours
Touch Screen	5-wire resistive (optional)
OS Support for Touch Screen Controller	Windows®XP, Window® 7, Linux

I/O

Display Input	VGA x 1, DVI x 1
Serial Port	RS-232 x 1 for touch screen controller
Audio	Line-in x 1 for internal speakers

Mechanical and Environmental

Power Requirement	+12V DC
Operating Temperature	0°C ~ 40°C(32°F ~ 104°F)
Storage Temperature	-20°C ~ 60°C(-4°F ~ 140°F)
Storage Humidity	10%~95%@35°C, non-condensing
Gross Weight	24.21 lb (11kg)
Net Weight	15.18 lb (6.9kg)
Certification	CE/FCC Class B, UL 60601-1, EN 60601-1

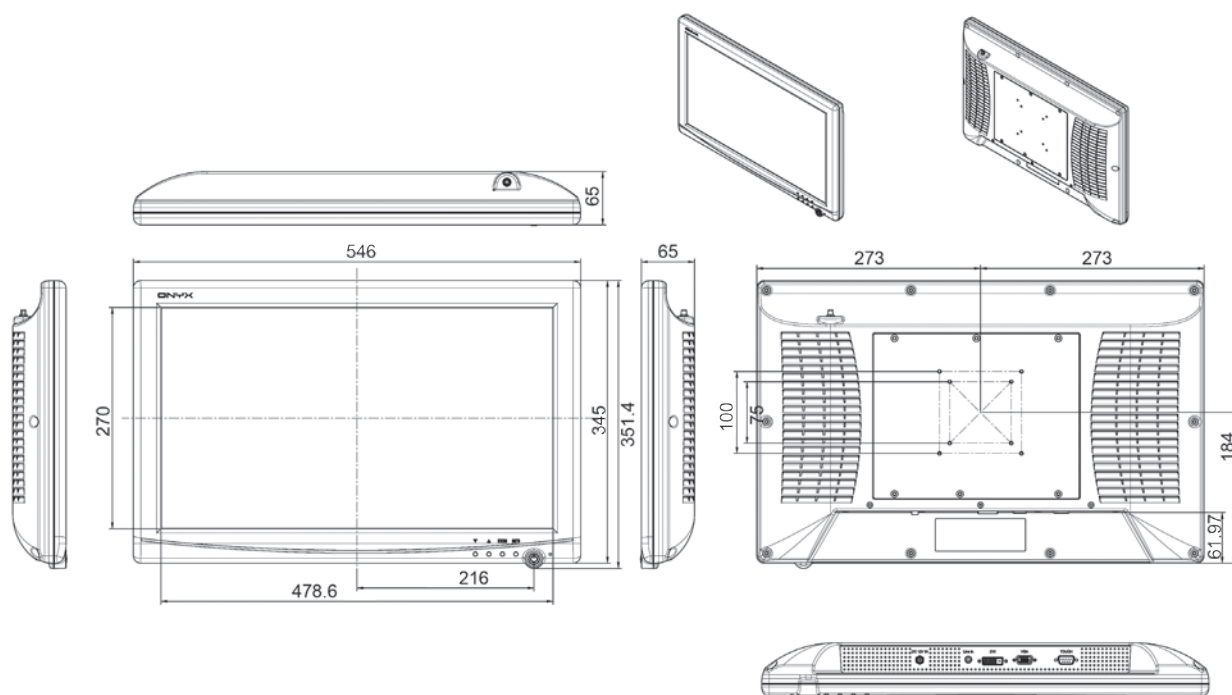

Ordering Information

- » TF-ONYX-322DT-A1-1010
Slim Medical Display, 22" LCD, DC 12V, Power Adapter
- » TF-ONYX-322DTT-A1-1010
Slim Medical Display, 22" LCD, DC 12V, Power Adapter, Touch Screen

Optional Accessories

- » TF-OPM-H02S
Desktop Stand with VESA 75/100