


ONYX-515

15" LED LCD Monitor

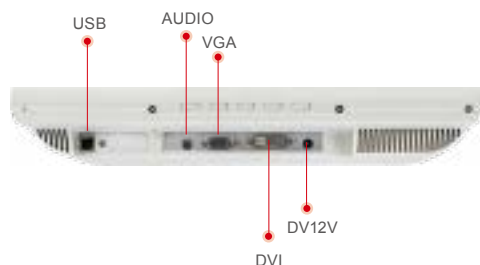

Features

- 15" LCD Panel with LED Backlight
- Compact and Terse Design
- Wide View Angle 160°(H)/130°(V)
- VGA x 1, DVI x1
- 5 wire resistive touch screen
- CE/ FCC Class B Passed 18, EN60601-1:2006
- Low Power Consumption



CE FCC



Specifications

Display

Size	15"
Resolution	1024 x 768
Max. Colors	16.2M
Brightness (Typ.)	250 nits
Viewing Angle (CR=10)(Typ.)	160°(H)/130°(V)
Contrast Ratio (Typ.)	700:1
Touch Screen	5 wire resistive touch screen (optional)

System

OS Support	Windows® XP, Window® 7
------------	------------------------

I/O

Audio	Audio-in x 1
Serial Port	USB x 1 for touch controller
Signal	VGA x 1, DVI x 1
Speaker	1W speaker x 1 on back side

Mechanical and Environmental

Power Requirement	DC12V / 5A power input
Operating Temperature	5°C ~ 40°C(41°F ~ 104°F)
Storage Temperature	-10°C ~ 60°C(14°F ~ 140°F)
Storage Humidity	10%~90%@35°C, non-condensing
Gross Weight	7.49lb (3.4kg)
Net Weight	6.17lb (2.8kg)
EMC	CE/FCC Class B Passed 18, ISO14971, EN 60601-1:2006
Dimension	347 x 296 x 45.2 (mm)



Ordering Information

- » ONYX-515DTT-A1-1020
LCD monitor.15" 250nits LED.DC 12V.R-TS.Med adapter
- » ONYX-515DT-A1-1020
LCD monitor.15" 250nits LED.DC 12V.Med adapter