

24" Marine Panel PC

Model#: W24L100-MRA1ID3S



Dimming



IP66 Proof



OSD Front Panel



AR Safety Glass



Anti-Corrosion



TouchScreen



Wide Voltage Input




Fanless






Low Power

Feature

- 24" Full HD 1920 x 1080 TFT LCD
- Intel® Atom Dual Core N2600 1.6GHz / D2550 1.86 GHz Processor (Optional)
- 1 x SO-DIMM, max. 4GB DDR3 800/1066
- 4 x Isolated RS422/485 (optional)
- Integrated Dual Broadcom BCM57780 GbE Controller
- Isolated Power Module

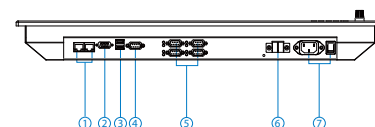

- | | |
|----------------------|---|
| 1. 2 x RJ45 | 5. 4 x RS232 (default) or
4 x Isolation-RS422/485 (optional) |
| 2. 1 x VGA out put | 6. 1 x 9~36V DC input |
| 3. 2 x USB | 7. 1 x AC input (optional) |
| 4. 1 x RS232/422/485 | |

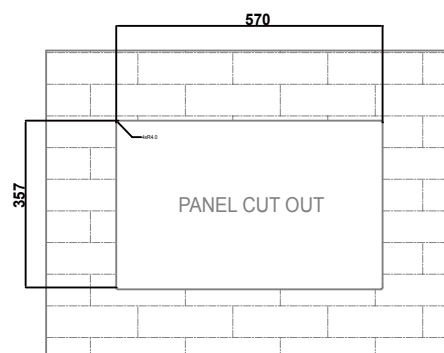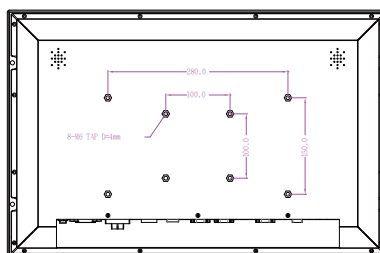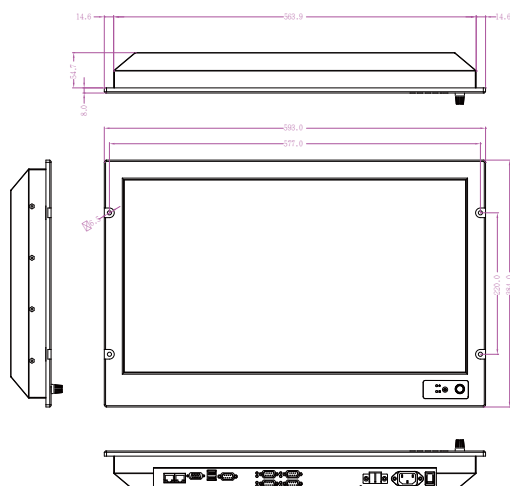

CUT OUT DIMENSION

★ Note: this is a simplified drawing and some components are not marked in detail. *Please contact our sales representative if you need further product information.

TFT Characteristics :

Pixel Number	: 1920 x 1080
Pixel Pitch(R&B)	: 0.276 (H) x 0.276 (V) mm
Contrast Ratio	: 5000:1(typ.)
Light Intensity	: 250 cd/m ² (typ.)
Viewable Angle	: -89 ~ 89(H) ; -89~89(H)
Active Display Area	: 531.36 (H) x 298.89 (V) mm
Max Colors	: 16.7 (M) / 8 bit / colors

SBC Specifications :

Processor	: Intel® Atom Dual Core N2600 1.6GHz / D2550 1.86 GHz (Optional)
BIOS	: AMI 4Mbit Flash
System Chipset	: Intel® NM10 express chipset
Memory Slot	: 1 x DDR3 800/1066MHz SODIMM,(Max 4GB)
Graphic Chipset	: Intel® Graphic Accelerator 3650
Storage	: 1 x SATA2, 1 x Mini PCIe slot (mSATA SSD)
Ethernet	: 2x RJ-45(1000 Gigabit Ethernet Compatible)
VGA	: 1x VGA Connector
Audio	: Realtek ALC886 HD Audio Codec
USB Ports	: 6 x USB 2.0 (4 x USB by pin-header)
Serial Ports	: 4 x RS232, 1 x RS232/422/485

Power Specifications :

Power Supply Options	: 9 to 36 V DC power supply with Terminal block (Default)
Power Consumption	: 100 W typical, normal operation

Mechanical and Environmental

Mechanical Mounting	: Panel (Flush) mount with IP66*, VESA
Operating Temperature	: -15 to 55 deg.C
Operating Humidity	: 5% to 95%(non condensing)
Anti-Vibration	: 5Hz~500Hz / 1Grms / 3 Axis
Anti-Shock	: 15G,11ms duration

Input / Output Connectors

Ethernet LAN	: 2 x RJ45-10/100/1000 Mbps
COM	: 1 x RS232/422/485
Expansion slot	: 4 x RS232 (default) or 4 x Isolated RS422/485 COM (optional)
USB	: 2 x USB Type-A receptable
VGA output	: 1 x VGA 15P D-SUB (female)
DC Power	: 1 x DC Terminal block

Available Options

Touch Screen Options	: 5 Wire Resistive
AR Safety Glass Options	: 3mm Anti-reflective protection glass
Secondary SSD	: up to 256 GB mSATA SSD

Certification and Approvals

- CE, FCC, DNV2.4, IEC60945, IACS-E10



RoHS