


Bar type Open frame monitor

Model Ref : BLM-32540K-HB

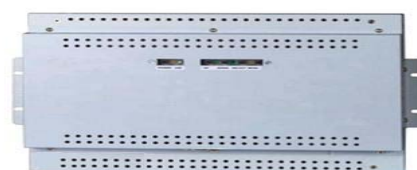

GENERAL SPECIFICATIONS

LCD Type	32,4" Active matrix TFT LCD
Case	Metal
Aspect Ratio	16:4,5
Key Controls	OSD controls

DISPLAY

Brightness	500 cd/m2 (LED backlight)
Contrast ratio	3000:1
Resolution	1920 x 540
Pixel pitch	363.7um x 363.7um
Viewing angle	178(H) x 178(V)
Active display area	698.4 x 196.4 mm
Response time	8ms

INPUTS & OUTPUTS

Input Signals	Analog RGB, DVI (Option : HDMI)
Output	

ELECTRICAL

Power supply	100-240VAC, 50/60Hz
Power consumption	12VDC 3.3A 40W

OPTIONS

Touch Screen	Not Yet
	Possible to Development

MECHANICAL

Dimension(LCD)	728.8 x 246.9 x 26.7mm
Dimension(MNT)	733.2 x 251.3 x 55mm
VESA	

OTHERS

Input Frequency	H : 31 ~ 80KHz V : 60-75 Hz
Operating Temp	0 ~ 50 degree
Hum	20 ~ 80 %
Storage Temp	-20 ~ 60 degree
Hum	10 ~ 90 %
Lamp Life Time	50,000 H

Options : * sign is " can't support now "
Any size able to customize

REAP Co. Ltd