

Datasheet

2.5" SATA SSD

3MG-P series

- Compliant with E-Mark/SAE J113/ISO 7637-2
- 2.5" SATA III solution for industrial field
- 7mm height mechanical design
- High random R/W performance
- iSMART disk health monitoring
- Intelligent error recovery system
- Excellent data transfer speed
- Enhanced power cycling management
- iCell technology for data protection (optional)



Introduction


Innodisk 2.5" SATA SSD 3MG-P is SATA III 6Gb/s Flash based disk, which delivers excellent performance and reliability making it the ideal solution for a variety of applications, including embedded system, industrial computing, and enterprise field.

2.5" SATA SSD

3MG-P series

Contact us for more information
about the 2.5" SATA SSD 3MG-P

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the industrial/embedded, aerospace and defense, and cloud computing industries.

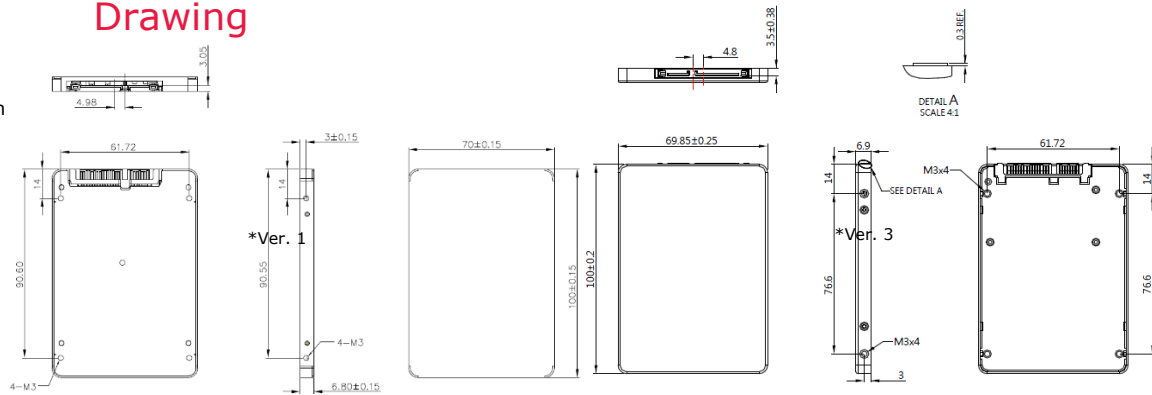

Specifications

Interface	SATA III
Flash Type	MLC
Capacity	8GB~512GB
Max. Channels	4
Sequential R/W (MB/sec, max.)	460 / 240
Max. Power Consumption	5 W (5V x 1A)
Thermal Sensor	ST- Optional/ WT- Default
External DRAM Buffer	✓
H/W Write Protect	-
Pin7 Power	-
ATA Security	✓
S.M.A.R.T.	✓
Dimension (WxLxH)	70.0 X 100.0 X 6.8 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

Headquarters (Taiwan)

5F., No. 237, Sec. 1, Datong Rd., Xizhi
Dist., New Taipei City,
Taiwan (R.O.C.)
Tel: +886-2-77033000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421
Europe
eusales@innodisk.com
+31-(0)40-282-1818
Japan
jpsales@innodisk.com
+81-45-594-7581
China
sales_cn@innodisk.com
+86-755-21673689
www.innodisk.com

© 2014 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

Ordering Information

20150319

Operation Temp.	8GB	16GB	32GB	64GB	128GB	256GB	512GB
Standard Grade (0°C ~ +70°C)	DGS25-08GD67RC%SC(P)	DGS25-16GD67RC%DC(P)	DGS25-32GD67RC%QC(P)	DGS25-64GD67RC%QC(P)	DGS25-A28D67RC1QC(P)	DGS25-B56D67RC1QC(P)	DGS25-C12D67RC1QC(P)
Industrial Grade (-40°C ~ +85°C)	DGS25-08GD67SW%SC(P)	DGS25-16GD67SW%DC(P)	DGS25-32GD67CW%QC(P)	DGS25-64GD67SW%QC(P)	DGS25-A28D67SW1QC(P)	DGS25-B56D67SW1QC(P)	DGS25-C12D67SW1QC(P)

Note: %= 1, 2, 3, ..., stands for internal control; P stands for iCell function which is optional.

innodisk

www.innodisk.com

(ES) Equipements Scientifiques SA - Département Modules & Systèmes Informatiques - 127 rue de Buzenval BP 26 - 92380 Garches
Tél. 01 47 95 99 80 - Fax. 01 47 01 16 22 - e-mail: msi@es-france.com - Site Web: www.es-france.com