

Datasheet

# CFast 3ME2 series

- Innovative Firmware Algorithm
- DRAM-less, 100% data integrity
- Excellent random performance
- Wide Temperature: -40°C ~85 °C
- Supports TRIM/NCQ/SMART
- Built in iData Guard



## Introduction

The Innodisk CFast 3ME2 operates at SATA III 6.0 Gb/s, which offers data transfer rate of read up to 440MB/s. and of sequential write up to 150MB/s. Compliant with CFast 2.0 standard, it is designed with 7+17 pin connector and is SATA compatible. Due to the idle power saving, it reduces 30% power consumption. CFast 3ME2 is featured as small form factor, and suitable for most industrial application.


CFast 3ME2 can work under harsh environment, and complies with ATA protocol. Without additional drives, the disk can be configured as a boot device or data storage device. CFast 3ME2 support hardware write protect to prevent modification of valuable data on a device. Besides, through Innodisk's enhanced power cycling technology and more capacitors, CFast 3ME2 prevents data loss caused by sudden power failure. By using Innodisk's iSMART, users can not only monitor the operation status of SSD, but also visualize Wear-Leveling status with graphics.

**innodisk**

[www.innodisk.com](http://www.innodisk.com)

# CFast 3ME2series

## Drawing

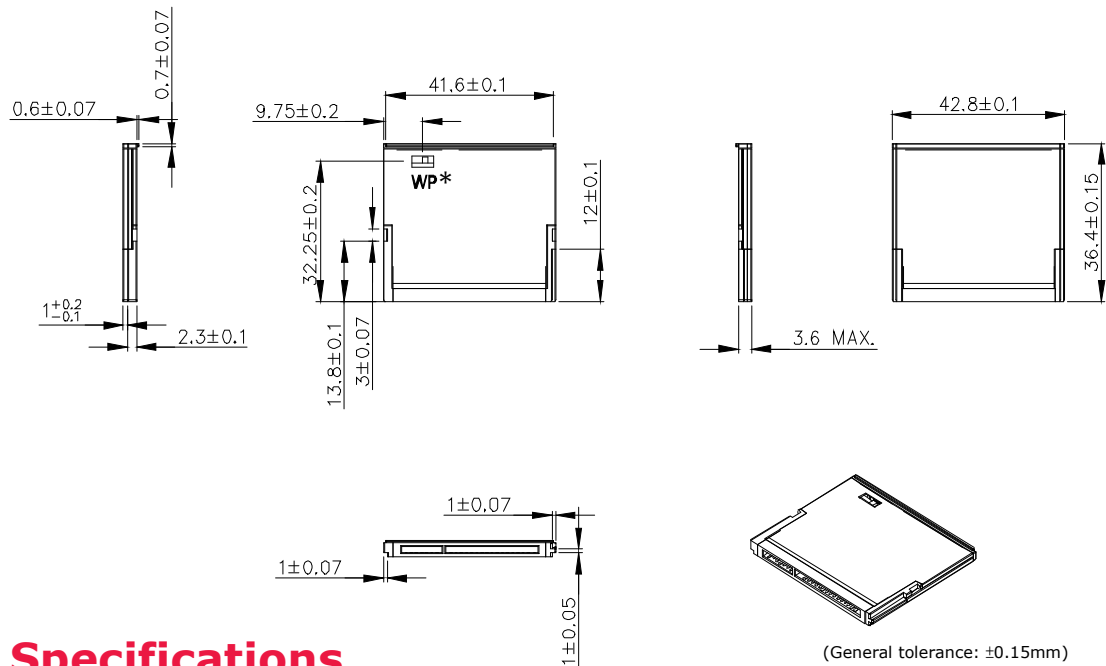

## Specifications

|                               |   |
|-------------------------------|---|
| Interface                     | SATA III  |
| Flash Type                    | MLC   |
| Capacity                      | 16GB~128GB  |
| Max. Channels                 | 4   |
| Sequential R/W (MB/sec, max.) | 440/150   |
| Max. Power Consumption        | 1.1W  |
| Thermal Sensor                | ST- optional/ WT- default   |
| External DRAM Buffer          | -   |
| H/W Write Protect             | Optional*   |
| ATA Security                  | √   |
| S.M.A.R.T.                    | √   |
| Dimension (WxLxH)             | 42.8X 36.4 X 3.6 mm   |
| Environment                   | Vibration: 20G @7~2000Hz<br>Shock: 1500G @ 0.5ms<br>Storage Temperature: -55°C ~ +95°C<br>MTBF: 3 million hours |

(General tolerance: ±0.15mm)

### Contact us for more information about the CFast 3ME2

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

### Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd., Xizhi Dist., New Taipei City 221, Taiwan (R.O.C.)

Tel: +886-2-77033000  
Email: sales@innodisk.com

### Branch Offices:

USA  
[usasales@innodisk.com](mailto:usasales@innodisk.com)  
+1-510-770-9421  
Europe  
[eusales@innodisk.com](mailto:eusales@innodisk.com)  
+31-040-282-1818  
Japan  
[jpsales@innodisk.com](mailto:jpsales@innodisk.com)  
+81-3-6667-0161  
China  
[sales\\_cn@innodisk.com](mailto:sales_cn@innodisk.com)  
+86-755-21673689  
[www.innodisk.com](http://www.innodisk.com)

© 2014 Innodisk Corporation.  
All right reserved. Specifications are subject to change without prior notice.

20151002

## Ordering Information

| Operation Temp.                  | 16GB                 | 32GB                 | 64GB                 | 128GB                |
|----------------------------------|----------------------|----------------------|----------------------|----------------------|
| Standard Grade (0°C ~ +70°C)     | DECFA-16GD72SCASN(W) | DECFA-32GD72SCADN(W) | DECFA-64GD72SCAQN(W) | DECFA-A28D72SCAQN(W) |
| Industrial Grade (-40°C ~ +85°C) | DECFA-16GD72SWASN(W) | DECFA-32GD72SWADN(W) | DECFA-64GD72SWAQN(W) | DECFA-A28D72SWAQN(W) |

\*H/W write protect function is optional.

For the write protect demand, please place the order by PN: DECFA-xxxD72SxAxNW

**innodisk**

[www.innodisk.com](http://www.innodisk.com)

(ES) Equipements Scientifiques SA - Département Modules & Systèmes Informatiques - 127 rue de Buzenval BP 26 - 92380 Garches  
Tél. 01 47 95 99 80 - Fax. 01 47 01 16 22 - e-mail: msi@es-france.com - Site Web: www.es-france.com