

Datasheet

CFast 3ME3 series

- Innovative Firmware Algorithm
- DRAM-less, 100% data integrity
- Excellent random performance
- Wide Temperature: -40°C ~85 °C
- Supports TRIM/NCQ/SMART
- Built in iData Guard



Introduction

The Innodisk CFast 3ME3 operates at SATA III 6.0 Gb/s, which offers data transfer rate of read up to 220MB/s. and of sequential write up to 130MB/s. Compliant with CFast 2.0 standard, it is designed with 7+17 pin connector and is SATA compatible. Due to the idle power saving, it reduces 30% power consumption. CFast 3ME3 is featured as small form factor, and suitable for most industrial application.

CFast 3ME3 can work under harsh environment, and complies with ATA protocol. Without additional drives, the disk can be configured as a boot device or data storage device. CFast 3ME3 support hardware write protect to prevent modification of valuable data on a device. Besides, through Innodisk's enhanced power cycling technology and more capacitors, CFast 3ME3 prevents data loss caused by sudden power failure. By using Innodisk's iSMART, users can not only monitor the operation status of SSD, but also visualize Wear-Leveling status with graphics.

innodisk

www.innodisk.com


(ES) Equipements Scientifiques SA - Département Modules & Systèmes Informatiques - 127 rue de Buzenval BP 26 - 92380 Garches
Tél. 01 47 95 99 80 - Fax. 01 47 01 16 22 - e-mail: msi@es-france.com - Site Web: www.es-france.com

CFast 3ME3_{series}

Drawing

Contact us for more information
about the CFast 3ME3

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

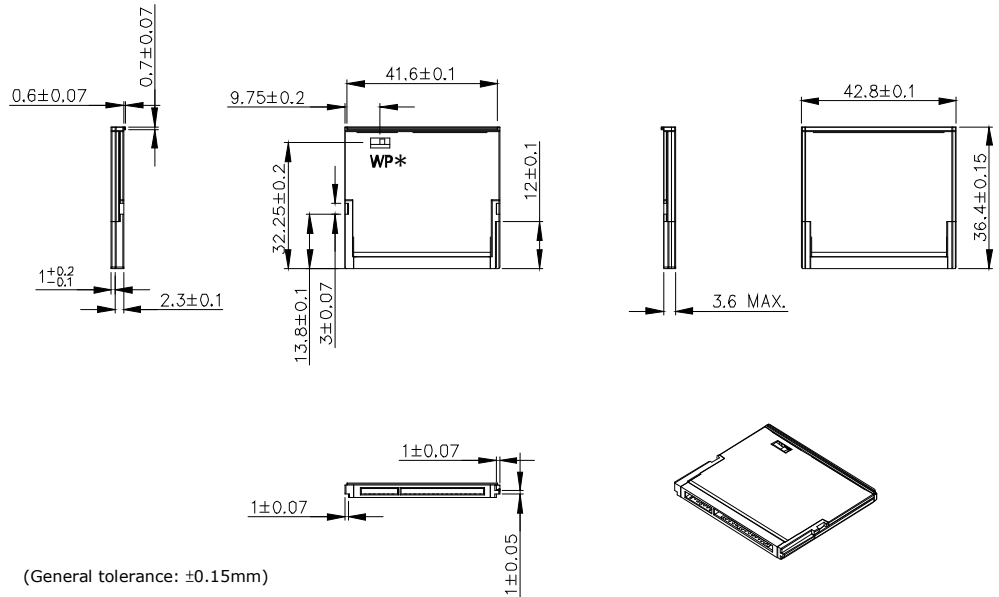

Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City 221,
Taiwan (R.O.C.)

Tel: +886-2-77033000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421
Europe
eusales@innodisk.com
+31-040-282-1818
Japan
jpsales@innodisk.com
+81-3-6667-0161
China
sales_cn@innodisk.com
+86-755-21673689

www.innodisk.com

© 2014 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

20151202

(General tolerance: ±0.15mm)

Specifications

Interface	SATA III
Flash Type	MLC
Capacity	8GB~256GB
Max. Channels	2
Sequential R/W (MB/sec, max.)	220/130
Max. Power Consumption	1.1W
Thermal Sensor	ST- optional/ WT- default
External DRAM Buffer	-
H/W Write Protect	Optional*
ATA Security	✓
S.M.A.R.T.	✓
Dimension (WxLxH)	42.8X 36.4 X 3.6 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

Ordering Information

Operation Temp.	8GB	16GB	32GB	64GB	128GB	256GB
Standard Grade (0°C ~ +70°C)	DECFA-08GD09SC1SC(W) DECFA-08GD09BC1SC(W)	DECFA-16GD09SC1DC(W) DECFA-16GD09BC1SC(W)	DECFA-32GD09SC1DC(W) DECFA-32GD09BC1DC(W)	DECFA-64GD09SC1DC(W) DECFA-64GD09BC1DC(W)	DECFA-A28D09SC1DC(W) DECFA-A28D09BC1DC(W)	DECFA-B56D09BC1DC(W)
Industrial Grade (-40°C ~ +85°C)	DECFA-08GD09SW1SC(W) DECFA-08GD09BW1SC(W)	DECFA-16GD09SW1DC(W) DECFA-16GD09BW1SC(W)	DECFA-32GD09SW1DC(W) DECFA-32GD09BW1DC(W)	DECFA-64GD09SW1DC(W) DECFA-64GD09BW1DC(W)	DECFA-A28D09SW1DC(W) DECFA-A28D09BW1DC(W)	DECFA-B56D09BW1DC(W)

*H/W write protect function is optional.

For the write protect demand, please place the order by PN: DECFA-xxxD09Sx1xCW
S: Toshiba A19nm MLC / B: Toshiba 15nm MLC

innodisk

www.innodisk.com

(ES) Equipements Scientifiques SA - Département Modules & Systèmes Informatiques - 127 rue de Buzenval BP 26 - 92380 Garches
Tél. 01 47 95 99 80 - Fax. 01 47 01 16 22 - e-mail: msi@es-france.com - Site Web: www.es-france.com