

Datasheet

CFast

3SE series

- SATA III interface
- Extremely low power consumption
- iSMART disk health monitoring
- Intelligent error recovery system
- Excellent data transfer speed
- Hardware write protect
- Enhanced power cycling management



Introduction

The Innodisk CFast 3SE operates at SATA III 6.0 Gb/s, which offers data transfer rate of read up to 470MB/sec. and of sequential write up to 250MB/s. Compliant with CFast 2.0 standard, it is designed with 7+17 pin connector and is SATA compatible. Due to the idle power saving, it reduces 30% power consumption. CFast 3SE is featured as small form factor, and suitable for most industrial application.



CFast 3SE can work under harsh environment, and complies with ATA protocol. Without additional drives, the disk can be configured as a boot device or data storage device. CFast 3SE support hardware write protect to prevent modification of valuable data on a device. Besides, through Innodisk's enhanced power cycling technology and more capacitors, CFast 3SE prevents data loss caused by sudden power failure. By using Innodisk's iSMART, users can not only monitor the operation status of SSD, but also visualize Wear-Leveling status with graphics.

CFast 3SE_{series}

Contact us for more information
about the CFast 3SE

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

Drawing

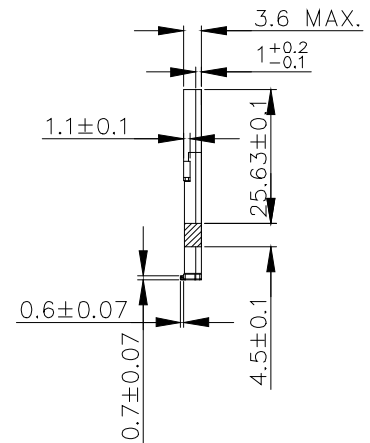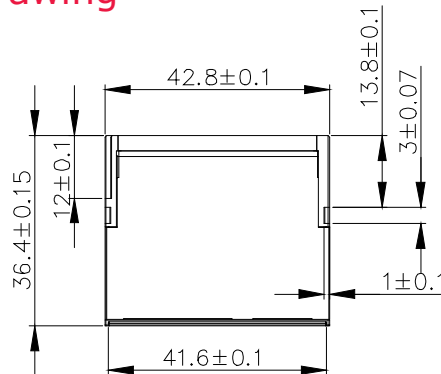

Specifications

Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City 221,
Taiwan (R.O.C.)

Tel: +886-2-77033000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421

Europe
eusales@innodisk.com
+31-040-282-1818

Japan
jpsales@innodisk.com
+81-45-594-7581

China
sales_cn@innodisk.com
+86-755-21673689
www.innodisk.com

© 2014 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

Interface	SATA III
Flash Type	SLC
Capacity	1GB~64GB
Max. Channels	4
Sequential R/W (MB/sec, max.)	470/250
Max. Power Consumption	1W
Thermal Sensor	Optional
External DRAM Buffer	-
H/W Write Protect	✓
ATA Security	✓
S.M.A.R.T.	✓
Dimension (WxLxH)	42.8X 36.4 X 3.6 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

20150113

Ordering Information

Operation Temp.	1GB	2GB	4GB	8GB	16GB	32GB	64GB
Standard Grade (0°C ~ +70°C)	DECFA-01GD07AC3SB	DECFA-02GD07AC3DB	DECFA-04GD06SCBDB	DECFA-08GD06SCBQB	DECFA-16GD06SCBQB	DECFA-32GD06SCBQB	DECFA-64GD06SCBQB
Industrial Grade (-40°C ~ +85°C)	DECFA-01GD07AW3SB	DECFA-02GD07AW3DB	DECFA-04GD06SWBDB	DECFA-08GD06SWBQB	DECFA-16GD06SWBQB	DECFA-32GD06SWBQB	DECFA-64GD06SWBQB

innodisk

www.innodisk.com

(ES) Equipements Scientifiques SA - Département Modules & Systèmes Informatiques - 127 rue de Buzenval BP 26 - 92380 Garches
Tél. 01 47 95 99 80 - Fax. 01 47 01 16 22 - e-mail: msi@es-france.com - Site Web: www.es-france.com