

Datasheet

M.2 (S80) 3MG2-P series

- SATA III solution for industrial field
- iSMART disk health monitoring
- Intelligent error recovery system
- Excellent data transfer speed
- Zero mechanical interference
- Anti-vibration mechanical design



Introduction

Innodisk M.2 (S80) 3MG2-P is designed as the standard M.2 form factor with SATA interface, and supports SATA III standard (6.0Gb/s) with excellent performance. The form factor refers to the M.2(NGFF) specification which established by JEDEC. Regarding of mechanical interference, Innodisk M.2 (S80) 3MG2-P absolutely replaces the traditional hard disk and makes personal computer, in any field, smaller and easier.

Innodisk M.2 (S80) 3MG2-P effectively reduces the booting time of operation system and the power consumption is less than hard disk drive (HDD), and complies with ATA protocol, no additional drives are required, and can be configured as a boot device or data storage device

innodisk


www.innodisk.com

M.2 (S80) 3MG2-P series

Contact us for more information about the M2 (S80) 3MG2-P.

Innodisk is a service-driven provider of industrial embedded flash and DRAM storage products and technologies, with a focus on the cloud computing, industrial/embedded, and aerospace and defense industries.

Diagram

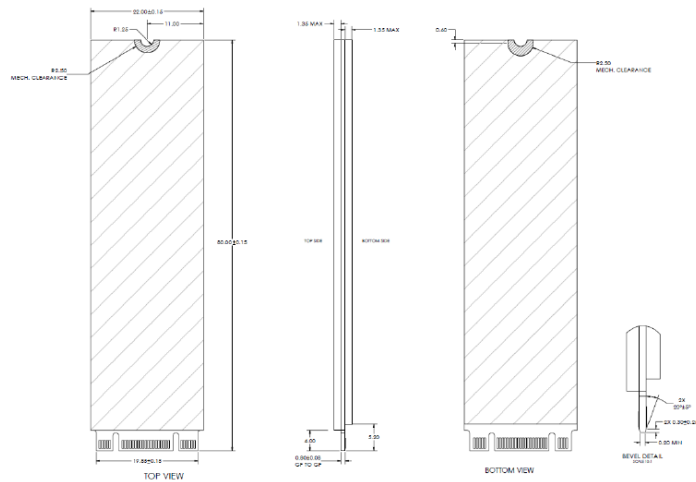

Headquarters (Taiwan)

5F., No.237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City 221,
Taiwan (R.O.C.)

Tel: +886-2-7703-3000
Email: sales@innodisk.com

Branch Offices:

USA
usasales@innodisk.com
+1-510-770-9421
Europe
eusales@innodisk.com
+31-040-282-1818
Japan
jpsales@innodisk.com
+81-3-6667-0161
China
sales_cn@innodisk.com
+86-755-21673689
www.innodisk.com

© 2015 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

20151203

Specifications

Interface	SATA III
Flash Type	MLC
P/E cycle	3,000
Capacity	16GB~512GB
Max. Channels	4
Sequential R/W (MB/sec, max.)	520 / 450
Max. Power Consumption	3.07 W (3.3V x 0.93 A)
Thermal Sensor	√
External DRAM buffer	√
H/W Write Protect	-
ATA Security	√
S.M.A.R.T.	√
Dimension (WxLxH)	22.0 X 80.0 X 3.5 mm
Environment	Vibration: 20G @7~2000Hz Shock: 1500G @ 0.5ms Storage Temperature: -55°C ~ +95°C MTBF: 3 million hours

Ordering Information

Operation Temp.	16GB	32GB	64GB	128GB	256GB	512GB
Standard Grade (0°C ~ +70°C)	DGM28-16GD81SCASN	DGM28-32GD81SCADN	DGM28-64GD81SCAQN	DGM28-A28D81SCAQC DGM28-A28D81SCAQN	DGM28-B56D81SCAQC DGM28-B56D81SCAQN	DGM28-C12D81SCAQC DGM28-C12D81SCAQN
Industrial Grade (-40°C ~ +85°C)	DGM28-16GD81SWASN	DGM28-32GD81SWADN	DGM28-64GD81SWAQN	DGM28-A28D81SWAQC DGM28-A28D81SWAQN	DGM28-B56D81SWAQC DGM28-B56D81SWAQN	DGM28-C12D81SWAQC DGM28-C12D81SWAQN

N: Micron MLC / C: Toshiba MLC

innodisk

www.innodisk.com

(ES) Equipements Scientifiques SA - Département Modules & Systèmes Informatiques - 127 rue de Buzenval BP 26 - 92380 Garches
Tél. 01 47 95 99 80 - Fax. 01 47 01 16 22 - e-mail: msi@es-france.com - Site Web: www.es-france.com