

Data Sheet

Module Type	DDR4 4GB/8GB/16GB UDIMM
Module speed	PC4-17000
Pin	288 pin
Cl-tRCD-tRP	15-15-15
SDRAM Operating Temp	0°C ~85°C

Rev 1.0

2008©Innodisk Corp. All rights reserved
Innodisk Corp. reserves the right to change the Products and Specification without notices.


The Total Solution For
Industrial Flash Storage

1. Features

Industry Nomenclature	Speed Grade	Data Rate MT/s			tRCD (ns)	tRP (ns)	tRC (ns)
		CL=11	CL=13	CL=15			
PC4-17000	R	1600	1866	2133	14.06	14.06	47.06

- JEDEC Standard 288-pin Dual In-Line Memory Module
- Intend for PC4-17000 applications
- Inputs and Outputs are SSTL-12 compatible
- VDD=VDDQ= 1.2 Volt (TYP)
- VPP=2.5 Volt (TYP)
- VDDSPD=2.2-3.6V
- Low-Power auto self-refresh (LPASR)
- SDRAMs have 16 internal banks for concurrent operation (4 Bank Group of 4 banks each)
- Normal and Dynamic On-Die Termination for data, strobe and mask signals.
- Data bus inversion (DBI) for data bus
- Fixed burst chop (BC) of 4 and burst length (BL) of 8 via the MRS
- Selectable BC4 or BL8 on-the fly (OTF)
- Golden Connector
- Fly-By topology
- Terminated control, command and address bus
- Programmable /CAS Latency: 11, 13, 15
- Operation temperature – (0°C~85°C)
- On-die VREFDQ generation and Calibration
- On-Board EEPROM
- RoHs and Halogen free (*Section 13*)

2. PACKAGE DIMENSION

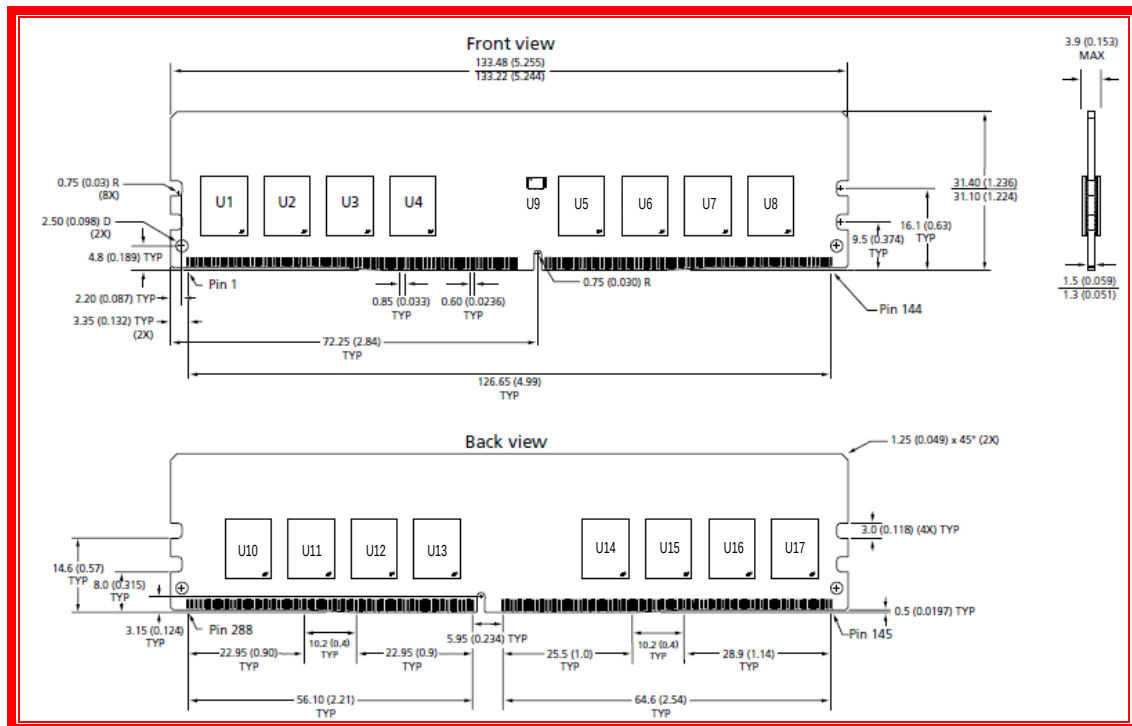

Note:

1. All dimensions are in millimeters (inches); MAX/MIN or typical (TYP) where noted.
2. The dimensional diagram is for reference only.

3. Ordering Information

Type & Speed	Density	Height	Innodisk Memory P/N
DDR4-2133 UDIMM	16GB	1.23"	M4U0-AGS1KCRG
	8GB	1.23"	M4U0-8GSSKCRG
	4GB	1.23"	M4U0-4GSSJCRG