

DATASHEET

Module TYPE	DDR3 16GB/8GB/4GB/2GB/1GB DIMM
Module speed	PC3-12800
CAS Latency	CL-11
Pin	240pin
SDRAM Operating Temp	0 °C ~ 85 °C

1. Features


Key Parameter

Industry Nomenclature	Speed Grade	Data Rate MT/s			tRCD	tRP	tRC
		CL=7	CL=9	CL=11	(ns)	(ns)	(ns)
PC3-12800	-	1066	1333	1600	13.125	13.125	13.125

JEDEC Standard 240-pin Dual In-Line Memory Module

- Intend for PC3-12800 applications
- Inputs and Outputs are SSTL-15 compatible
- VDD=VDDQ= 1.5 Volt $\pm$ 0.075
- VDD=VDDQ= 1.35 Volt (-0.067/+0.1V)
- Bi-directional Differential Data Strobe
- DLL aligns DQ and DQS transition with CK transition
- SDRAMs have 8 internal banks for concurrent operation
- Normal and Dynamic On-Die Termination support.
- SDRAMs are 78-ball BGA Package
- 8 bit pre-fetch
- Two different termination values (Rtt_Nom & Rtt_WR)
- Auto & self refresh 7.8 μ s ($T_A \leq +85^{\circ}\text{C}$)
- DRAM operating temperature range
 $0^{\circ}\text{C} \leq T_A \leq +85^{\circ}\text{C}$
- Programmable Device Operation:
 - Burst Type: Sequential or Interleave
 - Device CAS# Latency: 9
 - Burst Length: switch on-the-fly:
BL=8 or BC 4
- RoHS Compliant (Section 14)

2. PACKAGE DIMENSION

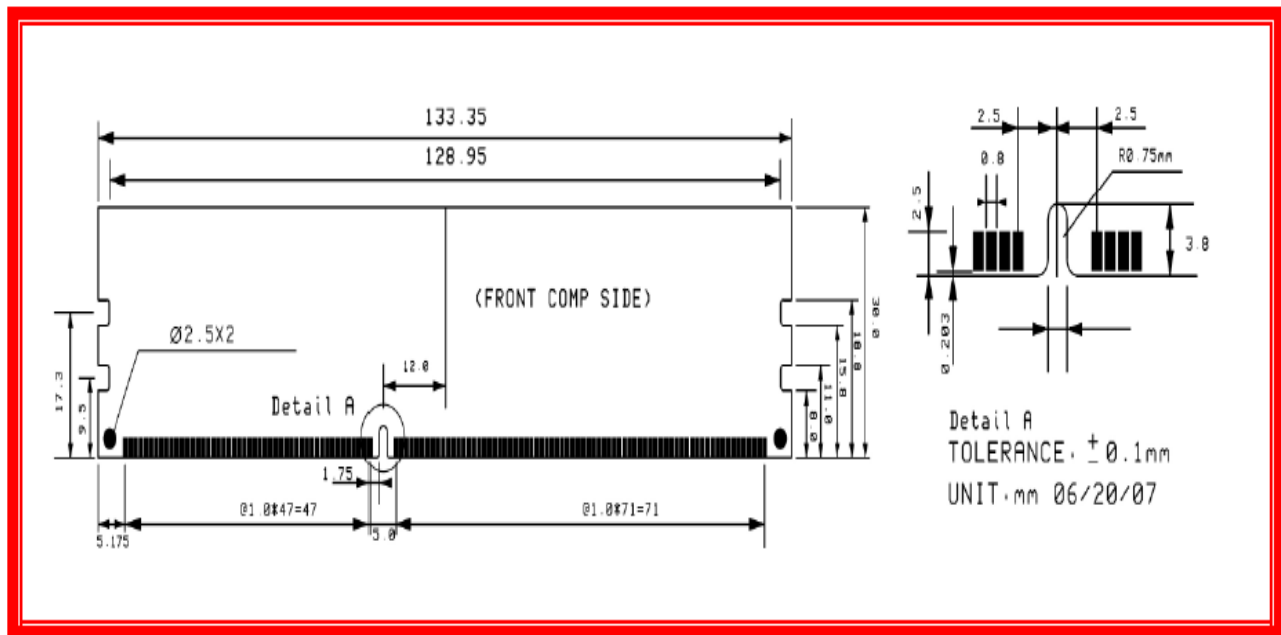

Note: Device position is only for reference.

3. Ordering Information

Type & Speed	Density	Height	Innodisk Memory P/N
DDR3L-1600 UDIMM	16GB	1.18"	M3U0-AGM1ALPC
	8GB	1.18"	M3U0-8GSSALPC
	4GB	1.18"	M3U0-4GSSBLPC
	2GB	1.18"	M3U0-2GSJBLPC
	1GB	1.18"	M3U0-1GPFB LPC