


ESPS-3401


PCIe to four SATA III Module

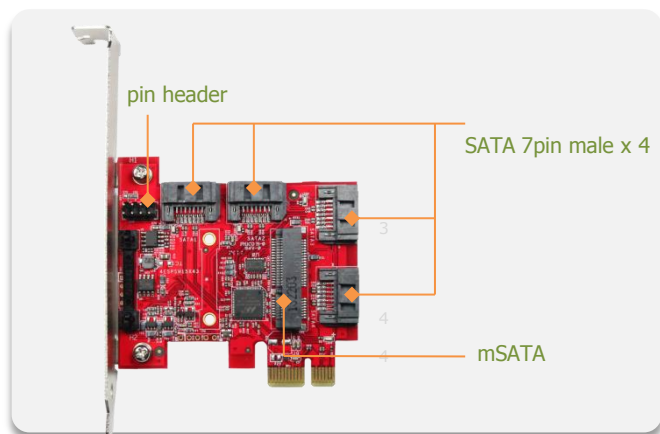

Features

- PCIe to four SATA III ports supported
- Auto switch between SATA port #4 & mSATA
- Supports AHCI, Port-Multiplier.
- Supports Native Command Queuing.
- Supports error reporting, recovery and correction.
- Pin header for LED connection.
- 30μ golden finger, 3 years warranty.
- Industrial design, manufactured in innodisk Taiwan

Mechanical Drawing

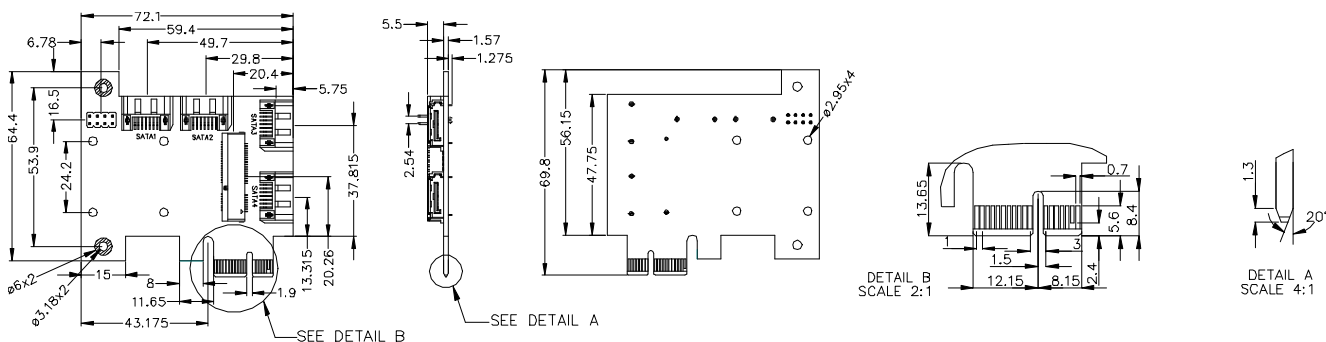

Specifications

Headquarters (Taiwan)

5F., No. 237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City 221,
Taiwan
Tel: +886-2-77033000
Email: sales@innodisk.com

Branch Offices:

USA

usasales@innodisk.com
+1-510-770-9421

Europe

eusales@innodisk.com
+31-040-282-1818

Japan

jpsales@innodisk.com
+81-45-594-7581

China

sales_cn@innodisk.com
+86-755-21673689

www.innodisk.com

© 2014 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

Form-Factor	STD PCIe
Input I/F	PCI Express 2.0
Output I/F	SATA III
Output Connector	SATA 7pin x 4, mSATA x 1 (mPCIe as an alternative to SATA #4 port)
TDP	2.74W (3.3V x 830mA)
Dimension (WxLxH)	72.1 x 69.8 x 8.3mm, Weight: 32g
Temperature	Operation: STD: 0°C ~ +70°C Storage: -55°C ~ +95°C
Environment	Vibration: 5G @7~2000Hz, Shock: 50G @ 0.5ms
Notes	Auto switch SATA port 4 & mSATA (alternative)

Order Information

ESPS-3401-C1

PCIe to four SATA III Module