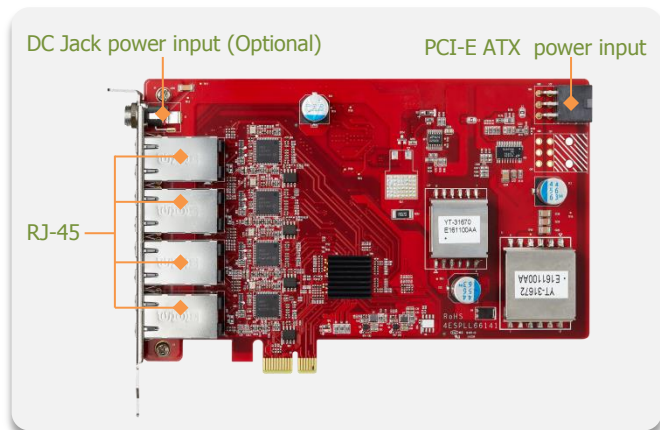



DC Jack power input (Optional)

PCI-E ATX power input

RJ-45

**Features**

- Complies with PCIe 2.0
- Support POE(AF) and POE+(AT)
- Supply power up to 75W for the following combination:
 - 1 POE+ and 3 POE
 - 2 POE+ and 1 POE
 - 4 POE
- Over-Current protection circuit
- 12-24V 6pin PCI-E ATX power input
- Optional 54V pin 2.5φ DC Jack power input
- Complies with EN61000-4-5 2kV Surge protection
- Complies with IEC 60950-1:2005 + A1: 2009 + A2:2013 2kV HiPOT protection
- Complies with EN61000-4-2 (ESD) Air-15kV, Contact-8kV
- 30μ golden finger, 3 years warranty.
- Industrial design, manufactured in innodisk Taiwan

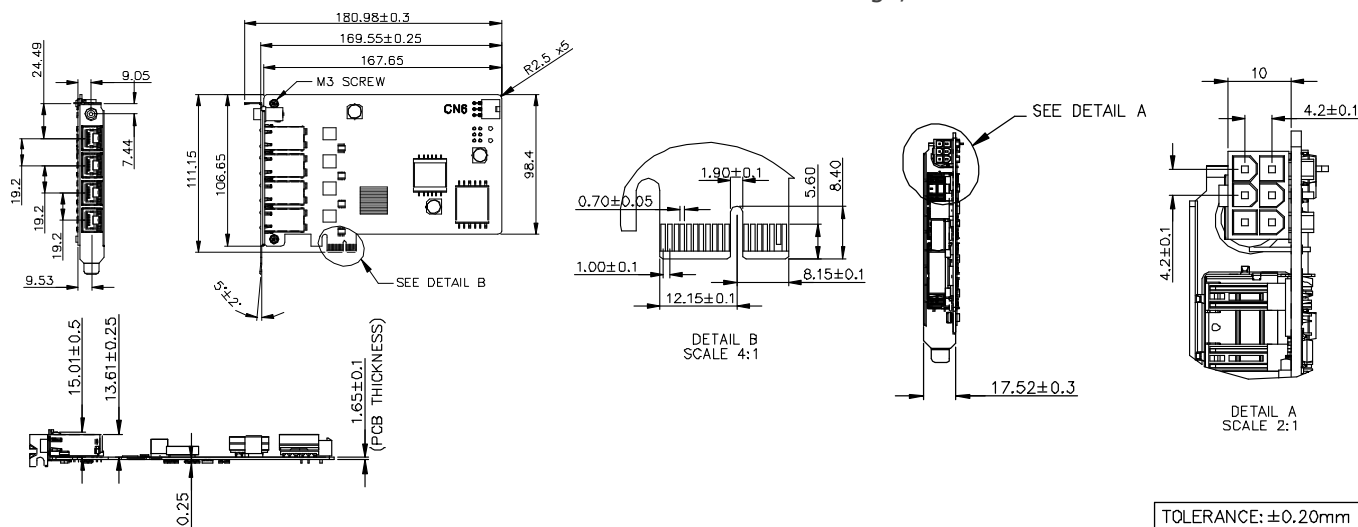Mechanical Drawing**Specifications**

Form-Factor	PCIe
Input I/F	PCI Express 2.0
Output I/F	Four GbE LAN
Output Connector	RJ-45 x 4
TDP	75W
Dimension (WxLxH)	111.15 x 169.55 x 18.8 mm (without DC Jack) 111.15 x 174.35 x 18.8 mm (With DC Jack)
Temperature	Operation: STD: 0°C ~ +70°C W/T: -40°C ~ +85°C Storage: -55°C ~ +95°C
Environment	Vibration: 5G @ 7~2000Hz, Shock: 50G @ 0.5ms
Notes	Please download driver from MyInnodisk website. Windows: XP(32bit), 7(32/64bit), 8/8.1(32/64 bit), 10(32/64bit) Linux: kernel 2.4 series, 2.6.x and 3.x version.

Order Information**ESPL-G4P1-C1 (without DC Jack, Standard Temp.)****ESPL-G4P1-W1 (without DC Jack, Wide Temp.)****ESPL-G4P1-C2 (with DC Jack, Standard Temp.)****ESPL-G4P1-W2 (with DC Jack, Wide Temp.)**

PCIe to four isolated GbE POE/POE+ Module

Headquarters (Taiwan)

5F., No. 237, Sec. 1, Datong Rd.,
Xizhi Dist., New Taipei City 221,
Taiwan
Tel: +886-2-77033000
Email: sales@innodisk.com

Branch Offices:**USA**

usales@innodisk.com
+1-510-770-9421

Europe

eusales@innodisk.com
+31-040-282-1818

Japan

jpsales@innodisk.com
+81-3-6667-0161

China

sales_cn@innodisk.com
+86-755-21673689

www.innodisk.com

© 2016 Innodisk Corporation.
All right reserved. Specifications
are subject to change without
prior notice.

August 24, 2016