
LILLIPUT®

DED OPEN FRAME DESIGN FOR OPTIONAL

TK1500-NP/C/T TK1500-NP/C

Industrial touch monitor series for embedded display solutions.

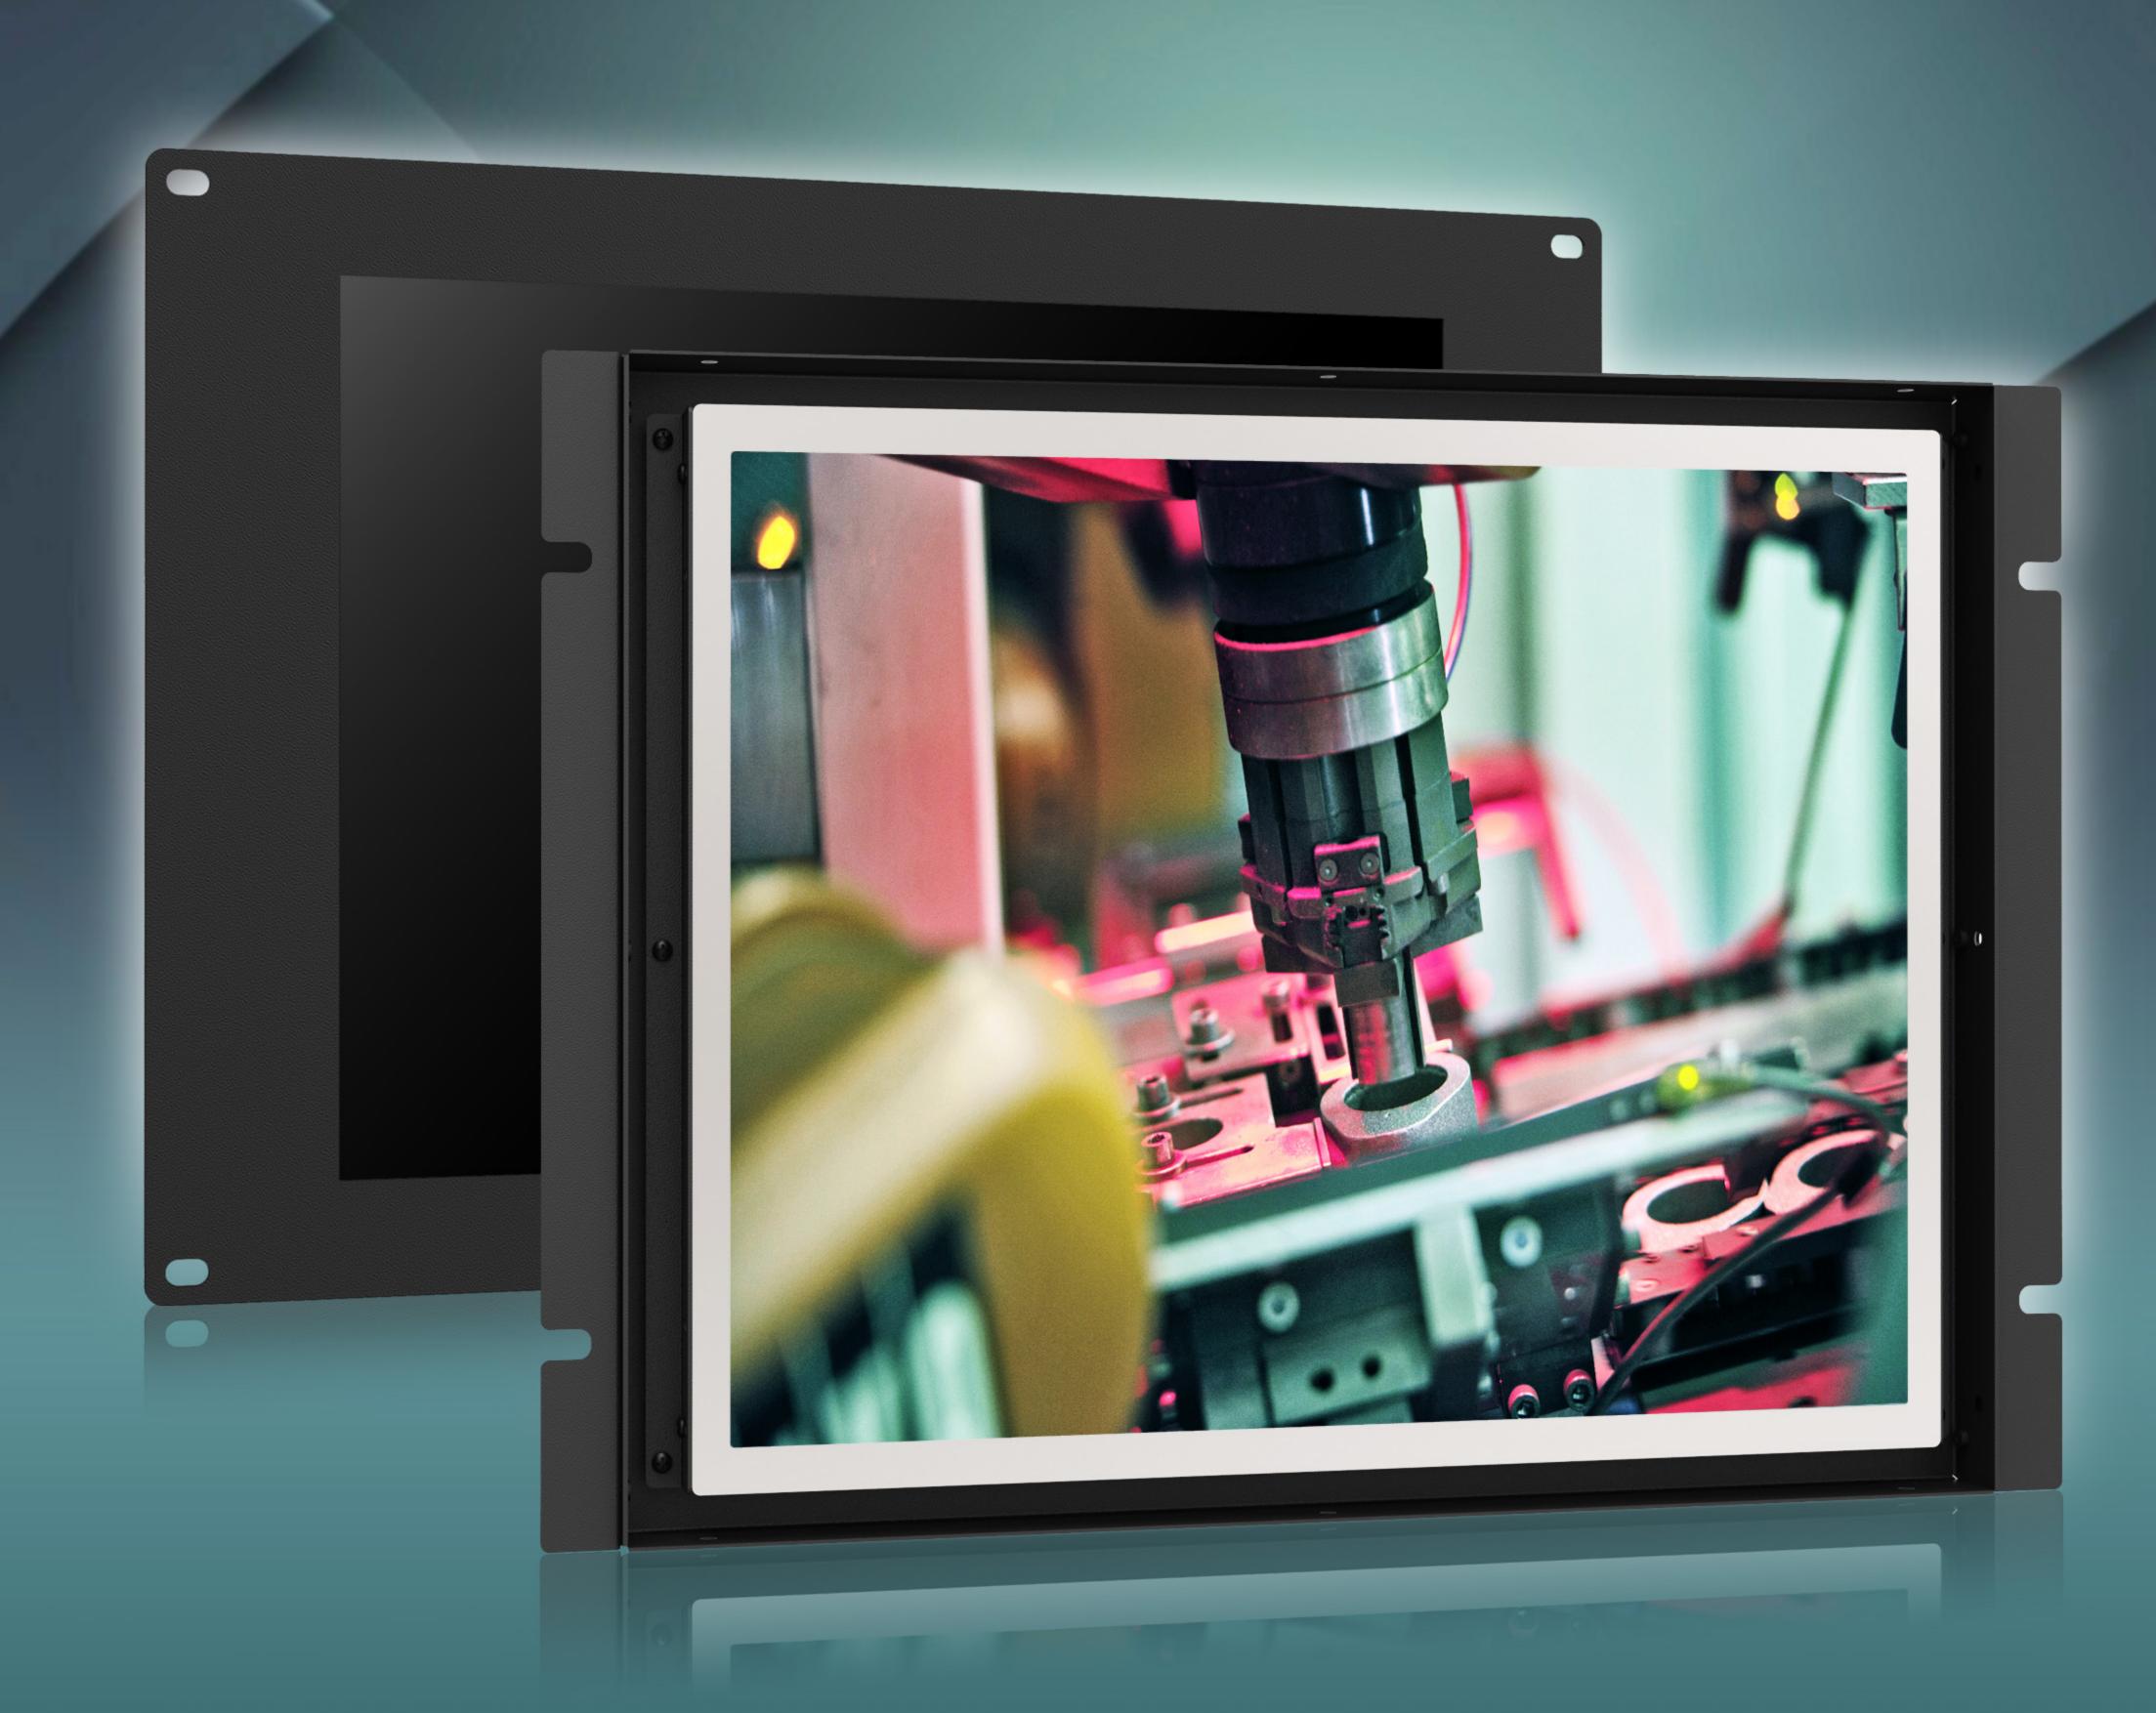


- 15" 1024×768 high resolution
- Aspect ratio: 4:3
- Touch panel: 5-wire resistive
- High contrast: 1500:1
- High brightness: 300cd/m²
- Viewing angle: 170° / 170° (H/V)
- HDMI, VGA, DVI & A/V inputs
- Metal housing design
- Integrated bracket for easy installation
- VESA & rear mounting methods





Applications

- KIOSK / POS machine
- Transportation machine
- Ticketing machine
- Financial ATM
- Entertainment / Gaming machine
- HMI equipment controller monitor
- Public communication machine
- Public advertisement machine



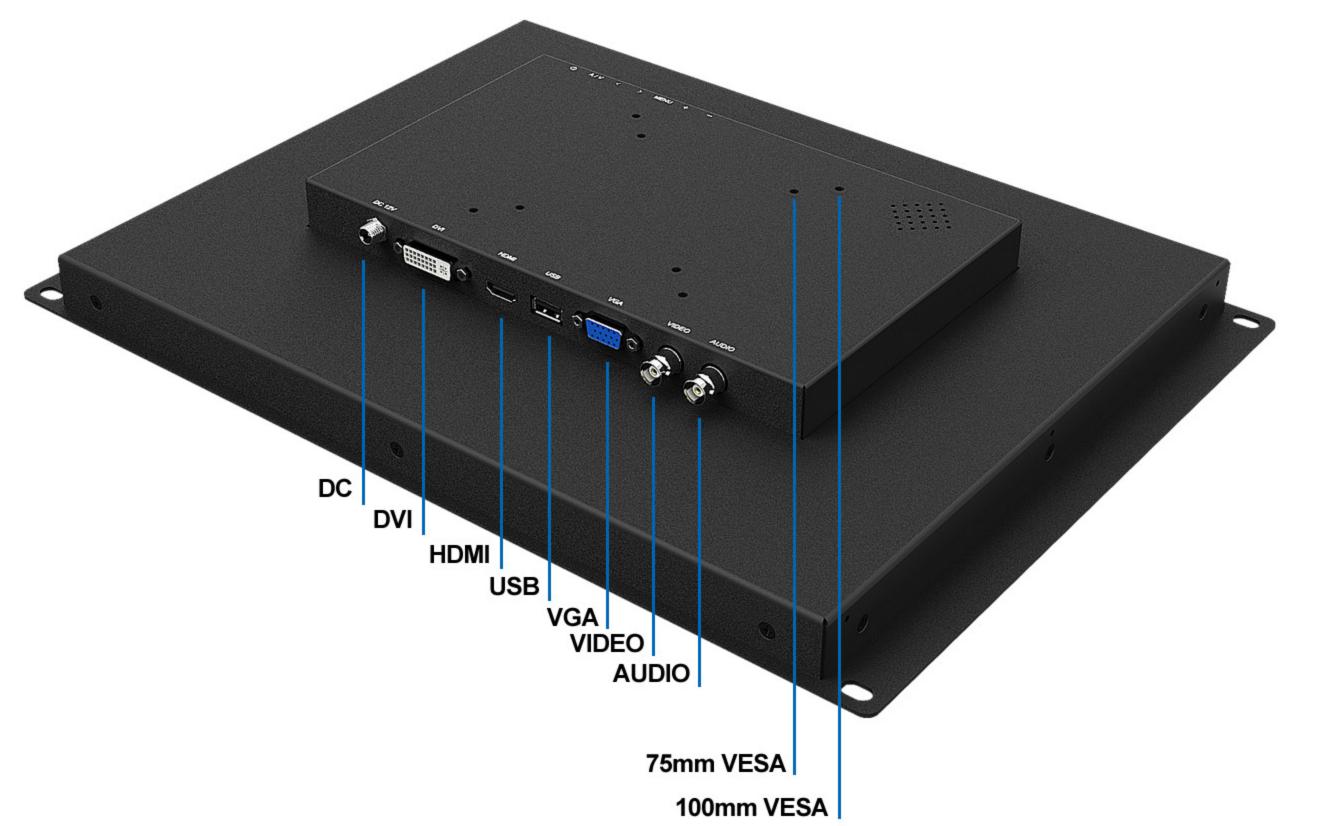


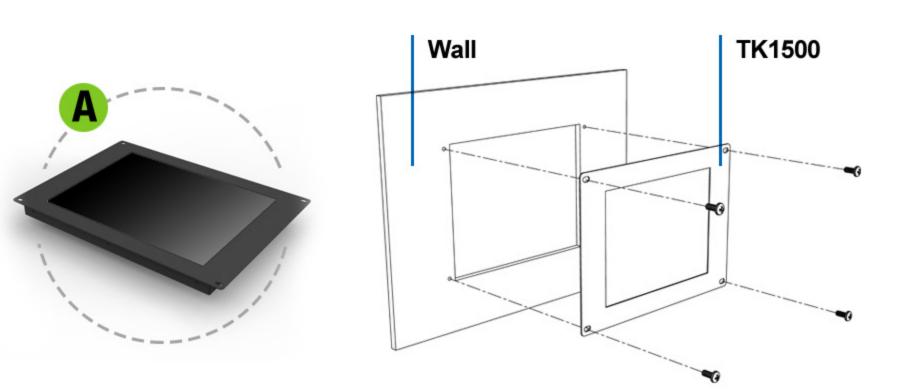

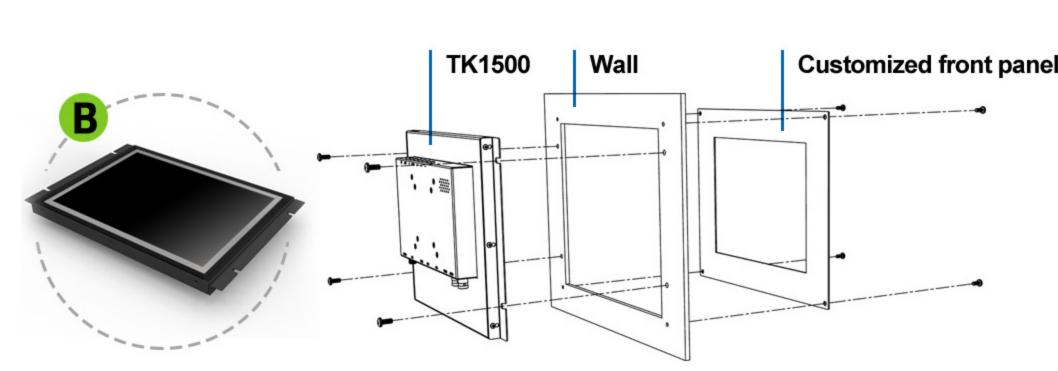

STRUCTURE

Lilliput LED industrial touch monitor series that supports rear mount (open frame) and VESA 75mm/100mm standard mounting with integrated bracket, a bezel-less design with slim and firm features making efficient integration into any embedded display applications.

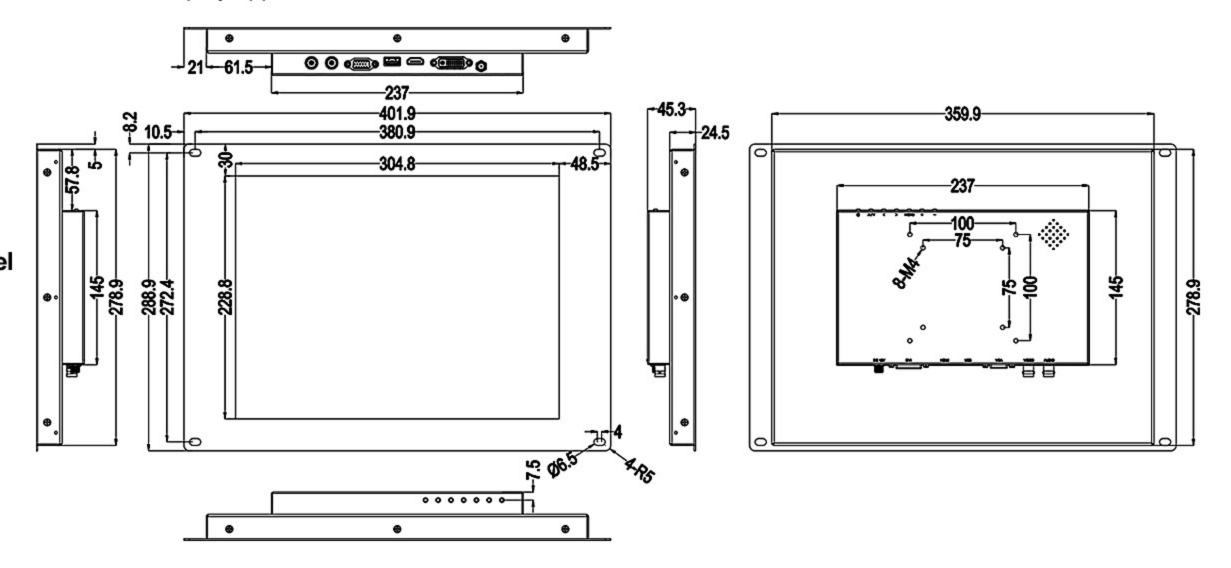

DISPLAY	Panel	15" LED backlit
	Physical Resolution	1024×768
	Touch Panel	5-wire resistive
	Aspect Ratio	4:3
	Brightness	300cd/m ²
	Contrast	1500:1
	Viewing Angle	170°/170° (H/V)
INPUT	HDMI	1
	DVI	1
	VGA	1
	USB	1 (for touch function)
	Audio (BNC)	1
	Video (BNC)	1
POWER	Current	1200mA
	Input Voltage	DC 12V
	Power Consumption	≤15W
ENVIRONMENT	Operating Temperature	-20°C ~ 60°C
	Storage Temperature	-30°C ~ 70°C
DIMENSION	Mounting Method	VESA 75mm / 100mm, rear mount
	Dimension(LWD)	402×289×45.5mm / 400×279×43.5mm (open frame
	Weight	3.2kg / 2.8kg (without touch panel)

ACCESSORIES FOR TOUCH FUNCTION

8. USB cable A-A 9. Drive disk 10. Touch pen

ACCESSORIES

Metal front panel or open frame bracket (option

1. HDMI A/A cable

3. Audio BNC cable

4. Video BNC cable

5. 12V DC adapter

7. DVI cable (optional)

2. VGA cable













