


## LINA-SL01

H110 or B150 Based Mini ITX Motherboard, supporting Intel 6th Gen. Skylake 1151 CPU

### Features

- H110 or B150, supporting 6th Gen. Skylake 1151 CPU
- Supporting trio independent diplay via HDMI 1+HDMI 2+LVDS (dual diplay for H110), and 4 K HD display via HDMI
- 1\*SO-DIMM DDR4
- 2\*SATA3.0
- 4\*USB2.0, 4\*USB3.0, 6\*RS232 COM (COM2 can change to 485), 1\*LPT, 1 \*MSATA, 1\*MINI PCIE, 8\*GPIO, 2\*SATA3.0, 1\*PS2
- 2\*LAN, supporting Wake on LAN, PXE
- 12V DC\_IN

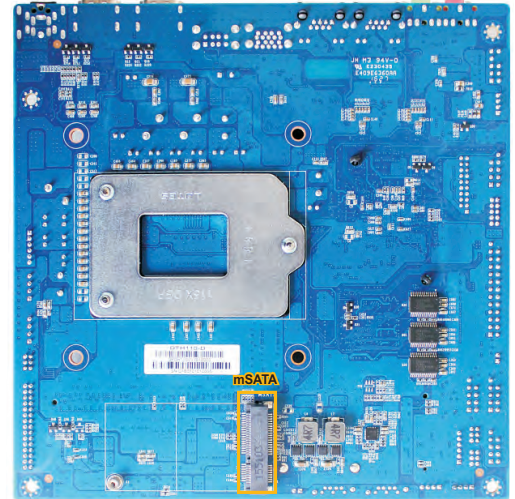

### Specifications

|                        |                                                                                                                                                           |                                                                                                                                            |
|------------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------|
| <b>CPU</b>             | H110 or B150, supporting 6th Gen. Skylake 1151 CPU                                                                                                        |                                                                                                                                            |
| <b>Memory</b>          | 1* DDR4                                                                                                                                                   |                                                                                                                                            |
| <b>Storage</b>         | 2*SATA3.0, 1*mSATA                                                                                                                                        |                                                                                                                                            |
| <b>Display</b>         | 2*HDMI, 1*LVDS<br>Supporting trio independent display, and HDMI features 4K                                                                               |                                                                                                                                            |
| <b>Ethernet</b>        | RTL8111F, 10Mbps/100Mbps/1000Mbps, 2 x LAN                                                                                                                |                                                                                                                                            |
| <b>Audio</b>           | Onboard ALC662 chip, Mic in, Line out                                                                                                                     |                                                                                                                                            |
| <b>Rear panel I/O</b>  | <ul style="list-style-type: none"> <li>• 1x DC jack</li> <li>• 2x HDMI</li> <li>• 2x USB3.0</li> <li>• 2x USB2.0</li> </ul>                               | <ul style="list-style-type: none"> <li>• 2x LAN</li> <li>• 1x Mic in</li> <li>• 1x Line out</li> </ul>                                     |
| <b>Internal I/O</b>    | <ul style="list-style-type: none"> <li>• 2x SATA3.0</li> <li>• 1x mSATA</li> <li>• 1x Mini-PCle(for Wi-Fi)</li> <li>• 1x SIM</li> <li>• 6x COM</li> </ul> | <ul style="list-style-type: none"> <li>• 2x USB2.0</li> <li>• 2x USB3.0</li> <li>• 1x LPT</li> <li>• 1x GPIO</li> <li>• 1x PS/2</li> </ul> |
| <b>Operating Temp.</b> | -20°C ~65°C                                                                                                                                               |                                                                                                                                            |
| <b>Wake on LAN</b>     | Yes                                                                                                                                                       |                                                                                                                                            |
| <b>Power</b>           | 12V DC_IN                                                                                                                                                 |                                                                                                                                            |
| <b>Dimension</b>       | 170 x 170 mm                                                                                                                                              |                                                                                                                                            |

