

# Mini TDGP™

## Features

- High accuracy
- Low power consumption
- Easy integration
- Long-term stability
- Multiple data output formats available
- Lightweight
- Internal data logger and controller with 2GB flash memory

## TDGP Sensor Applications

- Monitoring gas super-saturation levels in water
- Monitoring gas pressure in water wells during pumping
- Aquaculture
- Data correction for water samples collected for groundwater and wellwater monitoring
- Monitoring TDGP in transformer fluids


## Mini TDGP Submersible Sensor

The Mini TDGP measures the total dissolved gas pressure in liquids. It provides accurate TDGP data and is designed for use in aquaculture, dam spillways, groundwater monitoring, and industrial applications.

Unlike other total gas pressure probes, the Mini TDGP is not affected by increasing hydrostatic pressure. The sensor's semi-permeable membrane is also biofilm resistant.

The rugged Mini TDGP sensor is designed for use in water, oil, and contaminated mixtures. The probe combines an oil resistant membrane with a compact pressure sensor that provides quality TDGP data. The Mini TDGP sensor can be used for long term deployments with simple, stable and accurate results.

With periodic membrane cleaning and calibration checks, the Mini TDGP requires minimal maintenance.



**PRO** *Stability in a sea of change.*  
**OCEANUS**

# Mini TDGP™

## Sensor Specifications

### Sensor Performance

TDGP Range	0-2 bar Absolute
	0-7 bar Absolute
	0-14 bar Absolute
	*other ranges available
Resolution	0.002% of Full Scale
Accuracy	± 0.1% (Temperature compensated from -10 to 50° C)
Equilibration rate (t <sub>63</sub> )	1.5 minutes (with pumped head at 20° C)

### Physical

Length	28 cm (11 in)
Diameter	5.2 cm (2.1 in)
Weight	Air: 0.53 kg (1.2 lbs)
	Water: -0.06 kg (-0.1 lbs)
Housing Material	Acetal Plastic
Depth Rating	0-600 meters
Water Temperature	-2° to 50° C

### Electrical

Input voltage	5-30 VDC
Power consumption	0.06 W (15 mA at 5 V)
Data output	digital: RS-232, ASCII format
	analog: 0-5 V or 4-20 mA
4-Pin Male MCBH Impulse connector	

### Optional Accessories

#### Titanium Housings

Rated to 6000 m depth

#### Internal battery power

#### External battery pack

76 or 134 Amp-hour capacity

#### Water-pumped head

Reduces biofouling and improves response rate

#### Mooring frame with instrument brackets

#### Mooring cage with instrument brackets

#### Pigtail Cables with Locking Sleeves

5, 10, 25, 50 meters, or longer




Water-Pumped Head Accessory



Pigtail Cable with Locking Sleeve



Copper Antifouling Shield

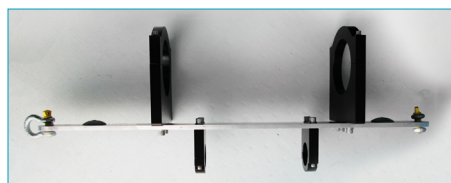

Instrument and Battery Mooring Bracket