


3.5" SubCompact Board with Intel® Pentium® N4200/ Celeron® N3350 Processor SoC

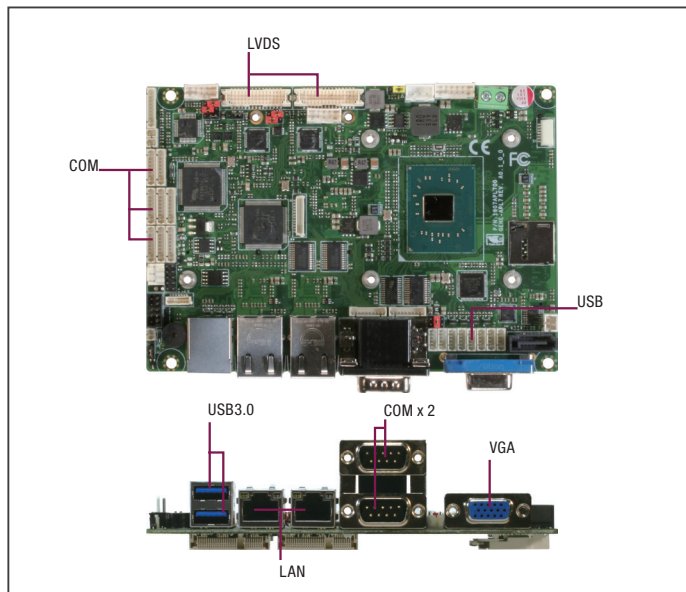

Specifications

System	
Form Factor	3.5" SubCompact Board
CPU	Intel® Pentium® N4200/ Celeron® N3350 Processor SoC
CPU Frequency	Up to 2.5 GHz
Chipset	Intel® Pentium® N4200/ Celeron® N3350 Processor SoC
Memory Type	DDR3L 1866MHz, SODIMM x 1
Max. Memory Capacity	Up to 8GB
BIOS	AMI
Wake on LAN	Yes
Watchdog Timer	255 Levels
Power Requirement	12V Only
Power Supply Type	AT/ ATX
Power Consumption (Typical)	Intel® N4200, DDR3L 1600MHz 8G, 1.16A@ +12V
Dimension (L x W)	5.75" x 4" (146 mm x 101.7 mm)
Operating Temperature	32°F ~ 140°F (0°C ~ 60°C)
Storage Temperature	-40°F ~ 176°F (-40°C ~ 85°C)
Operating Humidity	0% ~ 90% relative humidity, non-condensing
MTBF (Hours)	126,058
Certification	CE/FCC
Display	
VGA/LCD Controller	Intel® Pentium® N4200/ Celeron® N3350 Processor SoC
Video Output	VGA/LVDS1 (Option: LVDS2/eDP)
Backlight inverter supply	Max 12V, 2A
I/O	
Ethernet	Realtek RTL-8111E, RJ-45 x 2
Audio	High Definition Audio Interface (Optional: 2W Amp)
USB Port	Rear I/O: USB 3.0 x 2 Internal: USB2.0 x 8
Serial Port	Rear I/O: COM x 2 (COM2 is RS-232/422/485) Internal: COM x 4 (Option to COM x 10) COM2-5 support 5V/12V/RI
Parallel Port	—
HDD Interface	SATA 3.0 x 1
FDD Interface	—
SSD	mSATA x 1 (Full, optional for mini-card)
Expansion Slot	Mini-card x 1 (Full size)
DIO	8-bit
SIM	Micro SIM x 1 (Option)
TPM	—

Features

- Intel® Pentium® N4200/ Celeron® N3350 Processor SoC
- DDR3L 1866 MHz SODIMM x 1, up to 8 GB
- VGA/LVDS1/LVDS2 (LVDS1 Co-design with eDP, VGA with Internal and Rear Design)
- SATA 6.0 Gb/s x 1, GPIO x 8
- USB 3.0 x 2, USB 2.0 x 8, COM up to 12 ports (COM2-5 with 5V/12V/RI Design)
- mSATA x 1 (Full size), Mini Card x 1 (Full size) with uSIM
- DC 12V Only, AT/ATX Mode
- Optional: SPK Amplifier, I2S Design




Packing List

- Product DVD
- GENE-APL7

Optional Accessories


Part Number	Description	QTY
1700050207	(TF) USB CABLE. 1*5P Pitch=1.25mm Housinh. 20cm. for PFM-945C	8
1701090150	(TF) Flat Cable. D-Sub 9(M). 9P Housing. 9P 1.25mm pitch Housing. 15cm	10
1709100254	(TF) PHONE JACK Cable. 3P AUDIO JACK. 1*10P 1.25mm HOUSING(F). 25cm	1
1702150155	(TF) Power Cable. 15P SATA(F). 2P 2.0mm Housing(PH). 15cm	1
175011301C	(TF) BATTERY. Li. 3V. 210mAh. w/Wire 150±5mm. DIP. MAXELL. Battery Power. BP-CR2032-M150-002	1
170430030W	(TF) eDP Cable. 30P KEL SSL20-30S. 30P I-PEX 20453-030T. 30cm	1
170204010R	(TF) Power Cable. Double 4P 5.08mm Housing(M). 10cm	1
1703120130	(TF) LPC cable. 12P. to 12P 1.0mm Housing. 13cm	1
GENE-APL7-HSK01	Heatsink	1

Block Diagram

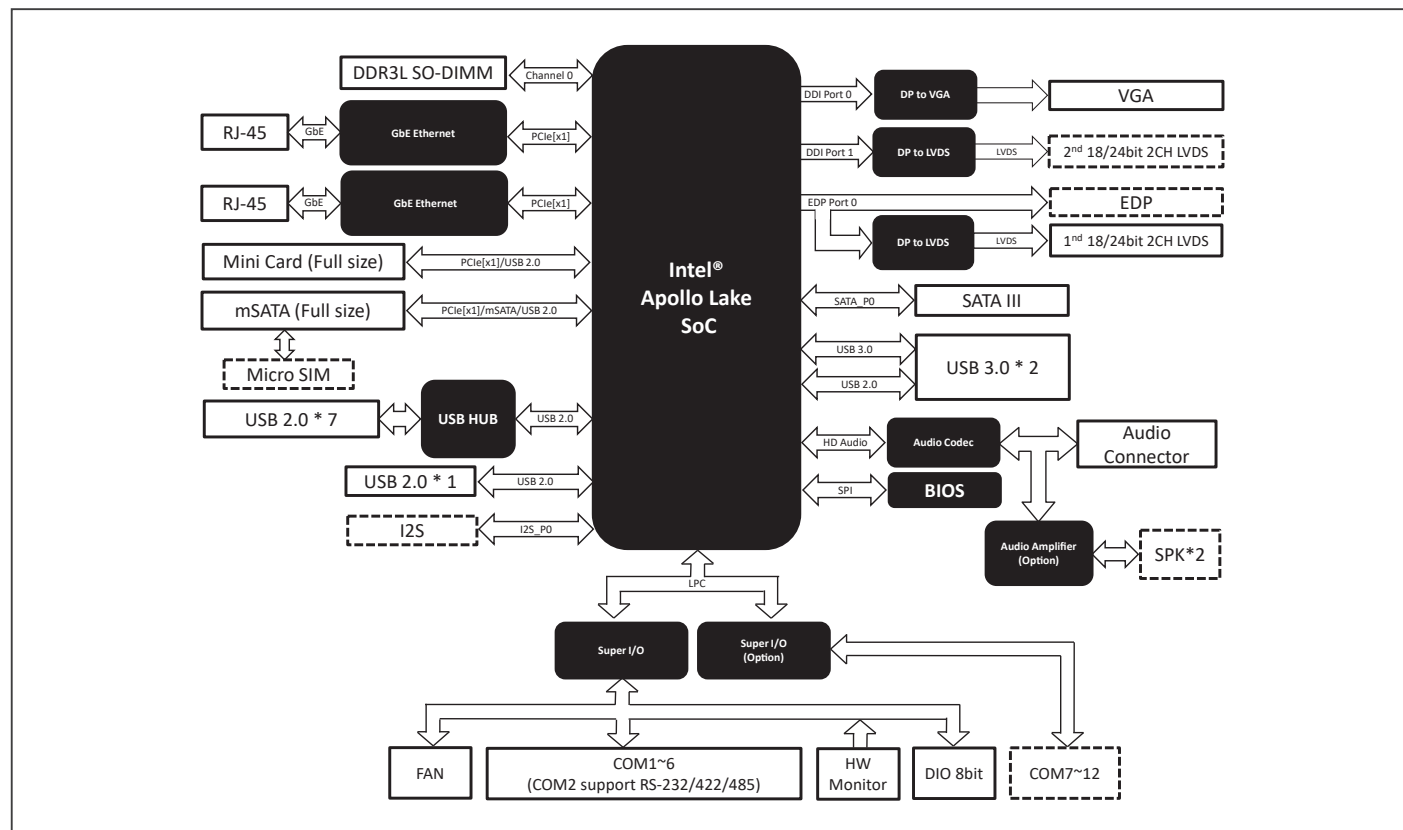

Dimension

Unit: mm

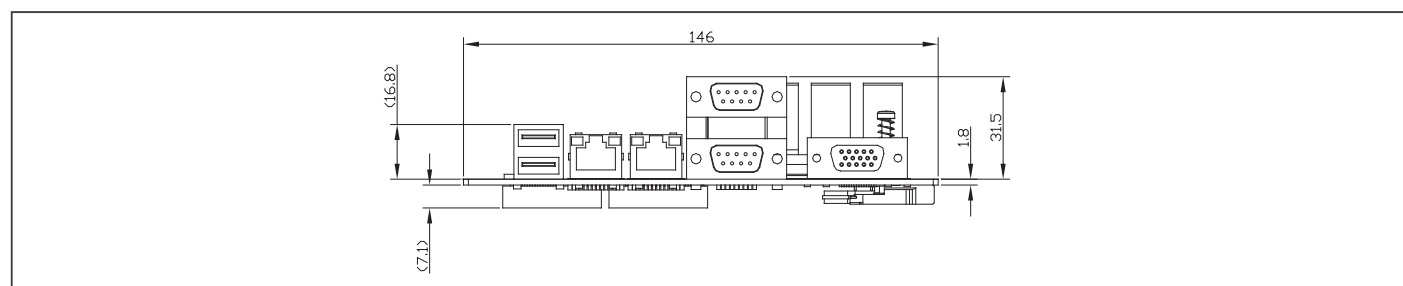

Ordering Information

Part Number	CPU	Fan/Fanless	Display	LVDS	Storage	LAN	USB	RS-232	RS-232/422/485	Expansion Slot	Power	Power Temp	Others
GENE-APL7-A10-0001	Celeron® N3350	Fanless	VGA/LVDS1	24bit, 2CH	SATA 6.0 Gb/s x 1 mSATA x 1 (Full size)	GbE x 2	USB 3.0 x 2 USB 2.0 x 8	5	1	MiniCard x 1 (Full)	+12V	0°C ~ 60°C	Audio, DIO x 8
GENE-APL7-A10-0002	Celeron® N3350	Fanless	VGA/LVDS1/ LVDS2	24bit, 2CH	SATA 6.0 Gb/s x 1 mSATA x 1 (Full size)	GbE x 2	USB 3.0 x 2 USB 2.0 x 8	11	1	MiniCard x 1 (Full)	+12V	0°C ~ 60°C	Audio, Micro-SIM, DIO x 8