

# Stand Alone IP65 LCD


## USB Type-C Display

10.1"

### Specifications

**RoHS**  
COMPLIANT  
2011/65/EU

|                                |                                                                                             |
|--------------------------------|---------------------------------------------------------------------------------------------|
| Model Name                     | W10L100-GCH2-C                                                                              |
| Panel Size                     | 10.1"                                                                                       |
| Active Display Area (mm)       | 216.96 (H) x 135.6 (V)                                                                      |
| Resolution                     | 1280 x 800                                                                                  |
| Brightness                     | 350 (Typical) nits                                                                          |
| Contrast Ratio                 | 800:1 (Typical)                                                                             |
| Viewing Angle (CR>=10 L/R/U/D) | -85~85 (H) ; -85~85 (V)                                                                     |
| Display Colors                 | 16.7M (8 bits/color)                                                                        |
| Standard Input Signal          | 1 x USB Type-C connector                                                                    |
| Touch Screen                   | Projected Capacitive Multi-touch (Default)<br>or<br>Protection Glass (non-touch) (Optional) |
| Speakers                       | 1 x Speaker (Optional)                                                                      |
| OSD                            | 5 Keys: -, +, Power, Esc, Enter                                                             |
| Power Source                   | USB Type-C Alt mode (5V/3A)                                                                 |
| Power Consumption              | 8W typical, Normal operation                                                                |
| Operating Temperature          | 0~50°C                                                                                      |
| Storage Temperature            | -10~60°C                                                                                    |
| Accessories                    | 1 x USB Type-C cable                                                                        |
| IP Rating                      | Front IP65                                                                                  |
| Certifications                 | CE, FCC                                                                                     |

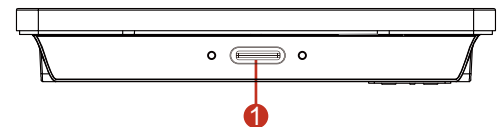

1. USB Type-C Connector
2. OSD Button

### Mechanical Drawing

