




EV2U-SSM1

USB 2.0 2MP Fixed Focus Camera Module

HIGHLIGHT FEATURES

- USB 2.0 Interface, 1920 x 1080 @30fps (Max Resolution)
- Support Low Light Condition, ISP Inside
- Lens FOV (D / H / V) : 121° / 102° / 54°
- OS Support : Windows, Linux, Android, macOS (UVC)
- Compliant to USB 2.0 and USB Video Class
- Complies with CE / FCC Class A

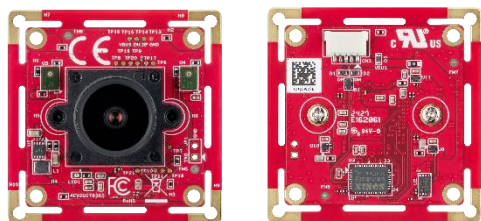

SPECIFICATIONS


Model Name	EV2U-SSM1
Module Type	USB 2.0 2MP Fixed Focus Camera Module
Resolution (Max.)	1920 x 1080 @30fps
Output I/F	USB 2.0
Shutter	Rolling
Video Format	YUV422, MJPEG
Power Consumption	Approximate 1W (MJPEG @Full Resolution)
Operating Temperature	-20°C ~ 70°C
Sensor Size	1/2.8"
Pixel Size	2.9µm
Lens Type	Fixed Focus (M12)
Dimension (W x L x H/mm)	38 x 38 x 26.6
Lens FOV (D / H / V)	121° / 102° / 54°
OS / Platform Support	Windows, Linux, Android, macOS
Warranty	3 Years



ORDER INFO.

P/N	Description
EV2U-SSM1-RLCF-11	USB 2.0 2MP Fixed Focus Camera Module (USB cable included) Dimension : 38 x 38mm
EV2U-SSM1-RLCF-12	USB 2.0 2MP Fixed Focus Camera Module, with DMIC (USB cable included) Dimension : 38 x 38mm
EV2U-SSM1-RLCF-A1	USB 2.0 2MP Fixed Focus Camera Module (USB cable included) Dimension : 32 x 32mm
EV2U-SSM1-RLCF-A2	USB 2.0 2MP Fixed Focus Camera Module, with DMIC (USB cable included) Dimension : 32 x 32mm
EV2U-SSM1-RLCF-21	USB 2.0 2MP Fixed Focus Camera Module, with Housing (USB cable included) Dimension : 41.4 x 41.4mm
7W2000000160	USB 2.0 cable 1 meter, 5 pins, pitch 1mm

MECHANICAL DRAWING

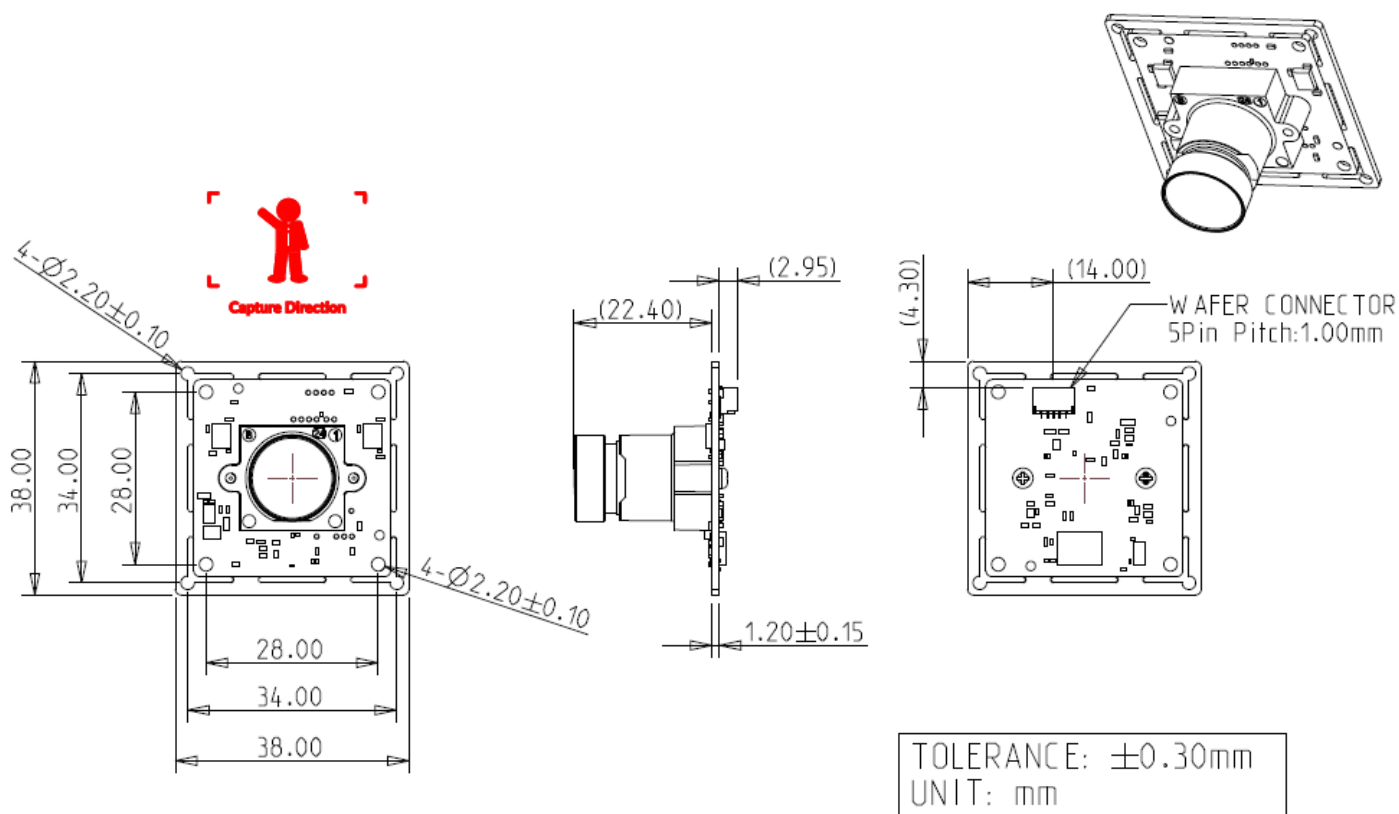


RESOLUTION MATRIX

Resolution	YUV422	MJPEG
1920 x 1080	5 fps	30 / 25 / 20 / 15 / 10 / 5 fps
1280 x 720	10 / 5 fps	30 / 25 / 20 / 15 / 10 / 5 fps
640 x 480	30 / 25 / 20 / 15 / 10 / 5 fps	30 / 25 / 20 / 15 / 10 / 5 fps




CONNECTOR PIN ASSIGNMENT

Pin #	Pin Name	Description
1	DCC	+5V
2	D-	Data-
3	D+	Data+
4	GND	Ground
5	GND	Ground



LENS SPEC.

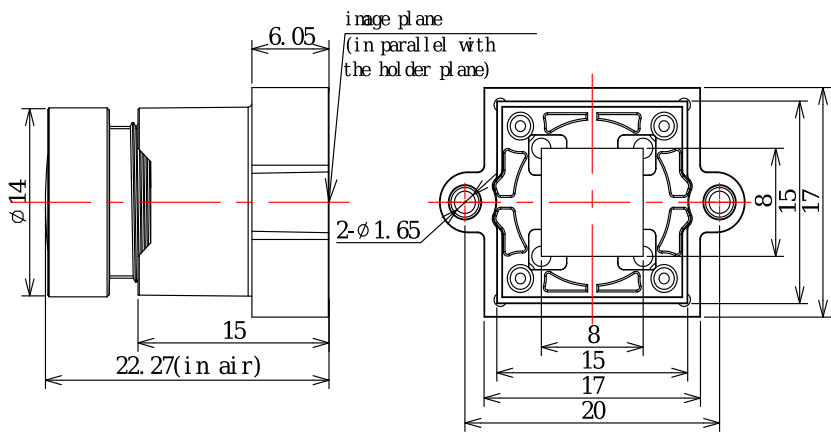

Items	Specification
F No.	1.6
Focal Length	3.28mm
Lens Structure	2G4P
Mount	M12 x P0.5 (S-Mount)

CABLE APPEARANCE

