


## VW Strain Gauge Surface Mount VWS-2000 Series

Designed for the long-term monitoring of steel or concrete structures. Gauges may be attached to steel structures by arc welding or, using alternative end blocks, bonded or grouted into concrete.

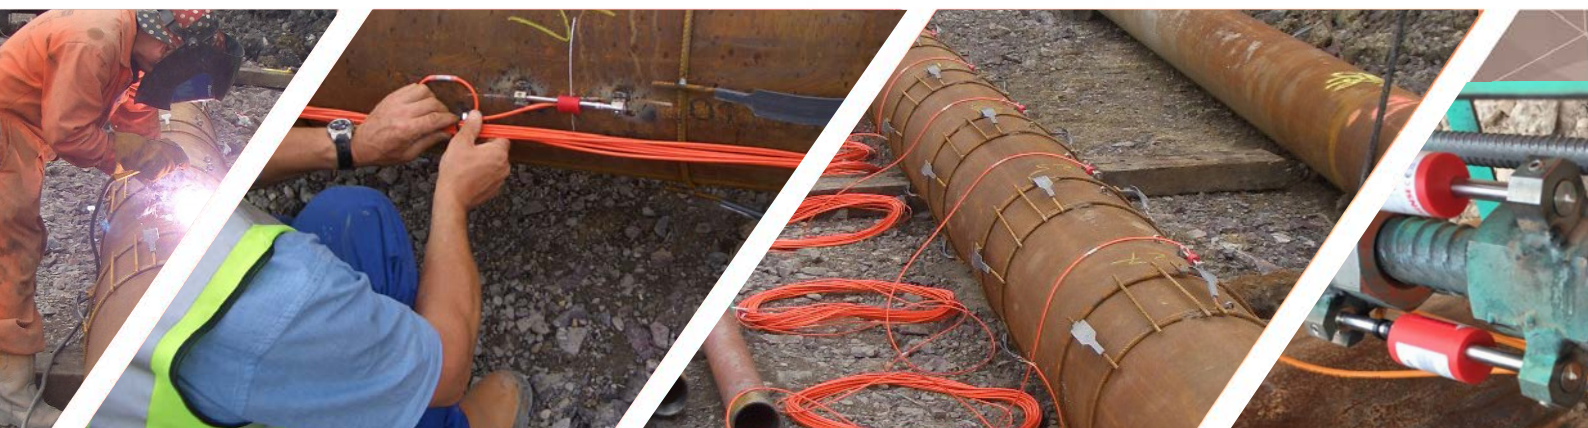

# VW Strain Gauge Surface Mount VWS-2000 Series

## Overview



Geosense® VWS-2000 series vibrating wire surface strain mount gauges are designed for the long term monitoring of steel or concrete structures. Gauges may be attached to steel structures by arc welding or, using alternative end blocks, bonded or grouted into concrete.

The strain gauge operates on the principle that a tensioned wire, when plucked, vibrates at its resonant frequency. The square of this frequency is proportional to the strain in the wire.

The gauge consists of two end blocks with a tensioned steel wire between them. The end blocks can be attached by either arc welding, bonding or groutable anchors to steel or concrete.

Around the wire is a magnetic coil which when pulsed by a vibrating readout or data logger interface plucks the wire and measures the resultant resonant frequency of vibration.

As the steel or concrete surface undergoes strain the end blocks will move relative to each other. The tension in the wire between the blocks will change accordingly thus altering the resonant frequency of the wire.

### APPLICATIONS

Measurement of stress and strain deformation in:

Steel struts

Excavation support systems

Driven and bored piles

Tunnel linings

Bridges & arches

On-board truck weighing

### FEATURES

Reliable long term performance

Rugged, suitable for demanding environments

Range of mounting blocks

Insensitive to long cable lengths.

High accuracy

Integral Thermistor

Suitable for remote reading and data logging

# VW Strain Gauge Surface Mount VWS-2000 Series

## Specifications

### GENERAL

Model	VWS-2000	VWS-2010
Gauge length	150mm	89mm
Overall length	156mm	95mm
Resolution	1 $\mu\epsilon$	1 $\mu\epsilon$
Strain range	3000 $\mu\epsilon$	3000 $\mu\epsilon$
Accuracy <sup>(1)</sup>	$\pm 0.1$ to $\pm 0.5\%$ FS	$\pm 0.1$ to $\pm 0.5\%$ FS
Non linearity	<0.5% FS	<0.5% FS
Temperature	-20°C to +80°C	-20°C to +80°C
Frequency range	850-1550Hz	900-2000Hz
Thermistor type	3K <sup>(2)</sup>	3K <sup>2</sup>
Thermistor accuracy	0.2°C	0.2°C
Thermal coefficient of expansion	12.0ppm/°C	12.0ppm/°C
Cable	Type 900 - VW Sensor with Foil Screen & Drain Wire	

### ORDERING INFORMATION

Gauge length
Anchor type
Cable length
Readout
Setting tool
Spacing jig
Dummy gauge

<sup>(1)</sup>  $\pm 0.1\%$  with individual calibration,  $\pm 0.5\%$  FS with standard batch calibration

<sup>(2)</sup> Other ranges available on request

# VW Strain Gauge Surface Mount VWS-2000 Series

---

## Specifications

Geosense® VWS-2000 series vibrating wire surface strain mount gauges are designed for the long term monitoring of steel or concrete structures. Gauges may be attached to steel structures by arc welding or, using alternative end blocks, bonded or grouted into concrete.

The strain gauge operates on the principle that a tensioned wire, when plucked, vibrates at its resonant frequency. The square of this frequency is proportional to the strain in the wire.

The gauge consists of two end blocks with a tensioned steel wire between them. The end blocks can be attached by either arc welding, bonding or groutable anchors to steel or concrete.

Around the wire is a magnetic coil which when pulsed by a vibrating readout or data logger interface plucks the wire and measures the resultant resonant frequency of vibration.

As the steel or concrete surface undergoes strain the end blocks will move relative to each other. The tension in the wire between the blocks will change accordingly thus altering the resonant frequency of the wire.

### ANCHOR TYPES

---



Arc Weld



Grout



Bolt/Bond

---



Geosense Ltd, Nova House, Rougham Industrial Estate, Rougham, Bury St Edmunds, Suffolk IP30 9ND, England

[www.geosense.co.uk](http://www.geosense.co.uk) e [sales@geosense.co.uk](mailto:sales@geosense.co.uk) t +44(0)1359 270457

Specifications may change without prior notice

V1.8 04/2019

ES France - Département Bio-Tests & Industries - 127 rue de Buzenval BP 26 - 92380 Garches  
Tél. 01 47 95 99 90 - Fax. 01 47 01 16 22 - e-mail: [bio@es-france.com](mailto:bio@es-france.com) - Site Web: [www.es-france.com](http://www.es-france.com)