

## Isolated Measurement Systems

TIVP1, TIVP05, TIVP02 Datasheet



IsoVu probe technology delivers accurate differential measurements up to  $\pm 2500$  V on reference voltages slewing  $\pm 60$  kV at 100 V/ns or faster. With the IsoVu Generation 2 design, you get all the benefits of IsoVu technology at 1/5 of the size of first generation probes.

With versatile MMCX connectors and an unmatched combination of bandwidth, dynamic range, and common mode rejection, IsoVu Gen 2 probes are setting new standards for isolated probe technology and enabling wide bandgap power designs using SiC and GaN.

### Benefits of IsoVu Probes


IsoVu technology uses power-over-fiber and an optical analog signal path for complete galvanic isolation between the measurement system and your DUT. By allowing the probe to float independently at the common mode voltage, isolation provides important advantages.

- 160 dB (100 million to 1) CMRR at DC
- Up to 120 dB (1 million to 1) CMRR at 100 MHz
- Up to 80 dB (10,000 to 1) CMRR at 1 GHz
- $\pm 60$  kV Common Mode Voltage range
- Up to  $\pm 2500$  V differential input Voltage range
- Up to  $\pm 2500$  V offset range

### High Voltage and High Bandwidth

With traditional differential probes you had to choose between high bandwidth or high voltage levels. IsoVu probes, with their shielded coaxial cable and isolation, provide high bandwidth and a differential voltage range of  $\pm 2500$  V. IsoVu Gen 2 offers bandwidths of 200 MHz, 500 MHz, and 1 GHz to fit your budget and performance needs.

### High Performance and Convenient Connections

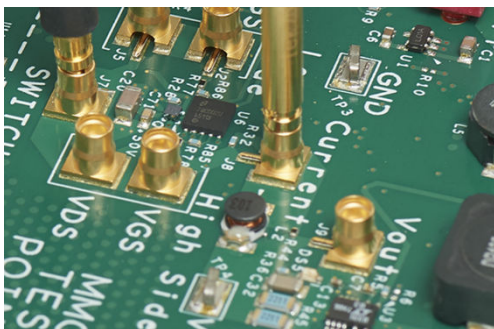

IsoVu probe tips have a range of connections and accessories that offer high performance and accessibility. The probes can connect directly to MMCX connectors, which are inexpensive and widely-available. This makes for stable, hands-free test points and offer high bandwidth and common mode rejection. The solid metal body shields the center conductor and minimizes ground loop area for the lowest interference possible.

Other accessories are available to adapt the probe tips to a wide range of connections. Additional 0.100" and 0.200" spaced square-pin tips are available for applications that require greater than  $\pm 250$  V differential

voltage. When not using a tip, the sensor head has 1 M $\Omega$  and 50 $\Omega$  switchable termination at the probe's SMA connector. This feature effectively adds an isolated channel to any compatible oscilloscope.

### Floating Measurements in Power Converter and Motor Drive Designs

Making high-side measurements in half-bridge power converters is challenging because the source or collector to which the measurements are referenced is slewing rapidly up and down. Wide bandgap devices like SiC and GaN FETs are even harder to measure because they can switch high voltages in a few nanoseconds. Noise from this rapidly changing common mode voltage leaks into the differential measurements and hides details on VGS and VDS. IsoVu probes have unmatched common mode rejection at full bandwidth that lets you see signal details, often for the first time.

### Applications

- Half/Full bridge designs using SiC or GaN, FETs, or IGBTs
- Floating measurements
- Power converter design
- Power device evaluation
- Switching power supply design
- Inverter design
- Motor drive design
- Electronic ballast design
- EMI and ESD troubleshooting
- Current shunt measurements

## Specifications

All specifications are Typical and apply to all models unless noted otherwise.

### Overview

Characteristic	TIVP1	TIVP05	TIVP02
Bandwidth	1 GHz	500 MHz	200 MHz
Rise time	450 ps	850 ps	2 ns

### Differential Input Voltage Range, Offset Range, Single-ended Impedance

Use only the sensor tip cables listed.

Sensor tip cable	Differential input voltage range	Offset range	Single-ended input impedance
SMA Input (50 $\Omega$ mode)	$\pm 5$ V	$\pm 25$ V	50 $\Omega$    N.A.
SMA Input (1 M $\Omega$ mode)	$\pm 5$ V	$\pm 25$ V	1 M $\Omega$    11 pF
TIVPMX10X	$\pm 50$ V	$\pm 200$ V	10 M $\Omega$    2.8 pF
TIVPMX50X	$\pm 250$ V	$\pm 250$ V	9.75 M $\Omega$    2.3 pF
TIVPSQ100X	$\pm 500$ V	$\pm 500$ V	9.75 M $\Omega$    3.5 pF
TIVPWS500X	$\pm 2.5$ kV	$\pm 2.5$ kV	40 M $\Omega$    2.4 pF
TIVPMX1X	$\pm 5$ V	$\pm 25$ V	50 $\Omega$ or 1 M $\Omega$    28 pF

### Common Mode Rejection Ratio

Approximately 20 dB lower in  $\pm 5$  V Range, except at DC.

Sensor tip cable	DC	1 MHz	100 MHz	200 MHz	500 MHz	1 GHz
SMA Input (50 $\Omega$ mode)	160 dB	145 dB	100 dB	100 dB	100 dB	90 dB
SMA Input (1 M $\Omega$ mode)	160 dB	145 dB	100 dB	100 dB	100 dB	90 dB
TIVPMX10X	160 dB	115 dB	92 dB	90 dB	85 dB	80 dB
TIVPMX50X	160 dB	110 dB	80 dB	80 dB	80 dB	70 dB
TIVPSQ100X	160 dB	105 dB	60 dB	50 dB	35 dB	25 dB
TIVPWS500X	160 dB	90 dB	50 dB	40 dB	20 dB	10 dB
TIVPMX1X	160 dB	125 dB	115 dB	110 dB	100 dB	90 dB

### Maximum Non-Destructive Differential Voltage

Sensor tip cable	Vpk (DC + peak AC) <sup>1</sup>
SMA Input (50 $\Omega$ mode)	5V RMS
SMA Input (1 M $\Omega$ mode)	100 Vpk
TIVPMX10X	250 Vpk
TIVPMX50X	300 Vpk
TIVPSQ100X	600 Vpk
TIVPWS500X	3300 Vpk
Table continued...	

<sup>1</sup> Derated with frequency; refer to the Maximum differential input voltage vs. frequency derating graph in the Specifications section of the TIVP Series IsoVu Measurement System User Manual.

Sensor tip cable	Vpk (DC + peak AC) <sup>1</sup>
TIVPMX1X	5 V RMS (50 $\Omega$ ), 100 Vpk (1 M $\Omega$ )

Common mode voltage range 60 kV peak

#### Common mode input impedance (Typical)

Input resistance Galvanically isolated through the fiber optic connection  
 Input capacitance <sup>2</sup> <2 pF

#### DC Gain accuracy

Differential DC gain accuracy <1.5% after self-cal; additional 4.5% within 4C of self-cal

#### System noise (rms)

Sensor tip cable	$\pm 20$ mV range (most sensitive)	$\pm 320$ mV range	$\pm 5$ V range (widest range)
SMA Input (50 $\Omega$ mode)	0.43 mV rms	1.46 mV rms	48 mV rms
SMA Input (1 M $\Omega$ mode)	0.43 mV rms	1.46 mV rms	48 mV rms
TIVPMX10X	4.3 mV rms	14.6 mV rms	480 mV rms
TIVPMX50X	21.5 mV rms	73 mV rms	2.4 V rms
TIVPSQ100X	43 mV rms	146 mV rms	4.8 V rms
TIVPWS500X	215 mV rms	730 mV rms	24 V rms

#### Propagation delay

2 meter cable 18.3 ns  
 10 meter cable 63.7 ns

### Laser certification

#### CLASS I LASER PRODUCT

This product complies with 21 CFR 1040.10 and 1040.11 except for deviations pursuant to Laser Notice No. 50, dated June 24, 2007.

<sup>1</sup> Derated with frequency; refer to the Maximum differential input voltage vs. frequency derating graph in the Specifications section of the TIVP Series IsoVu Measurement System User Manual.

<sup>2</sup> The capacitance between the sensor head and a reference plane. The sensor head is placed six inches (15.25 cm) above the reference plane.

## Ordering information

### Models

TIVP1	Tektronix IsoVu 1 GHz Isolated Probe with 2 m cable
TIVP05	Tektronix IsoVu 500 MHz Isolated Probe with 2 m cable
TIVP02	Tektronix IsoVu 200 MHz Isolated Probe with 2 m cable
TIVP1L	Tektronix IsoVu 1 GHz Isolated Probe with 10 m cable
TIVP05L	Tektronix IsoVu 500 MHz Isolated Probe with 10 m cable
TIVP02L	Tektronix IsoVu 200 MHz Isolated Probe with 10 m cable

### Standard accessories

016-2147-xx	IsoVu carrying case for 2 m cable models; soft case (with foam insert) protects the TIVP and enforces the optical fiber minimum bend radius
016-2149-xx	IsoVu carrying case for 10 m cable models; soft case (with foam insert) protects the TIVP and enforces the optical fiber minimum bend radius
003-1947-xx	SMA wrench/driver tool; 5/16" wrench for use on SMA connector
131-9717-xx	Probe tip adapter; adapt an MMCX IsoVu tip to standard 0.100" spaced, 0.025" square pins
352-1179-xx	Probe bipod for probe; TIVP can rotate in holder to accommodate square pin headers
TIVPMX10X	MMCX probe tip; MMCX tip is recommended for the best bandwidth and CMRR performance
071-3733-xx	TIVP Series Quick Reference Guide
---	Certificate of traceable calibration

Translated manuals can be downloaded as pdf files on your local Tektronix Web site.

### Recommended accessories

TIVPMX50X	50X sensor tip cable with MMCX connector
TIVPSQ100X	100X sensor tip cable with 0.100" spaced square pin connectors
TIVPWS500X	500X sensor tip cable with 0.200" spaced wide square pin connector
TIVPMX1X	1X MMCX sensor tip
131-9677-xx	Square Pin to MMCX Adapter, 0.062" Spacing
352-1170-xx	Probe Tip Tripod Support
196-3546-xx	Lead, MMCX to IC Grabber
196-3547-xx	Lead, Square Pin to IC Grabber
020-3189-xx	Kit, Wide Square Pin to Banana Jack with Alligator Clamps and Support Brace
196-3434-xx	Square Pin Y-lead
206-0569-xx	MicroCKT grabbers
020-3169-xx	Spare Pins for 0.062" Spaced Test Points
003-1946-xx	Solder Aid for 0.062" Spaced Square Pins

### Supported oscilloscopes

The measurement systems can only be used with 4 Series, 5 Series, and 6 Series Mixed Signal Oscilloscopes.

## Service options

Opt. C3	Calibration Service 3 Years
Opt. C5	Calibration Service 5 Years
Opt. D1	Calibration Data Report
Opt. D3	Calibration Data Report 3 Years (with Opt. C3)
Opt. D5	Calibration Data Report 5 Years (with Opt. C5)
Opt. R3	Repair Service 3 Years (including warranty)
Opt. R5	Repair Service 5 Years (including warranty)

Probes and accessories are not covered by the oscilloscope warranty and Service Offerings. Refer to the datasheet of each probe and accessory model for its unique warranty and calibration terms.



Tektronix is ISO 14001:2015 and ISO 9001:2015 certified by DEKRA.



Product Area Assessed: The planning, design/development and manufacture of electronic Test and Measurement instruments.

ASEAN / Australasia (65) 6356 3900  
 Belgium 00800 2255 4835\*  
 Central East Europe and the Baltics +41 52 675 3777  
 Finland +41 52 675 3777  
 Hong Kong 400 820 5835  
 Japan 81 (3) 6714 3086  
 Middle East, Asia, and North Africa +41 52 675 3777  
 People's Republic of China 400 820 5835  
 Republic of Korea +822 6917 5084, 822 6917 5080  
 Spain 00800 2255 4835\*  
 Taiwan 886 (2) 2656 6688

Austria 00800 2255 4835\*  
 Brazil +55 (11) 3759 7627  
 Central Europe & Greece +41 52 675 3777  
 France 00800 2255 4835\*  
 India 000 800 650 1835  
 Luxembourg +41 52 675 3777  
 The Netherlands 00800 2255 4835\*  
 Poland +41 52 675 3777  
 Russia & CIS +7 (495) 6647564  
 Sweden 00800 2255 4835\*  
 United Kingdom & Ireland 00800 2255 4835\*

Balkans, Israel, South Africa and other ISE Countries +41 52 675 3777  
 Canada 1 800 833 9200  
 Denmark +45 80 88 1401  
 Germany 00800 2255 4835\*  
 Italy 00800 2255 4835\*  
 Mexico, Central/South America & Caribbean 52 (55) 56 04 50 90  
 Norway 800 16098  
 Portugal 80 08 12370  
 South Africa +41 52 675 3777  
 Switzerland 00800 2255 4835\*  
 USA 1 800 833 9200

\* European toll-free number. If not accessible, call: +41 52 675 3777

**For Further Information.** Tektronix maintains a comprehensive, constantly expanding collection of application notes, technical briefs and other resources to help engineers working on the cutting edge of technology. Please visit [www.tek.com](http://www.tek.com).

Copyright © Tektronix, Inc. All rights reserved. Tektronix products are covered by U.S. and foreign patents, issued and pending. Information in this publication supersedes that in all previously published material. Specification and price change privileges reserved. TEKTRONIX and TEK are registered trademarks of Tektronix, Inc. All other trade names referenced are the service marks, trademarks, or registered trademarks of their respective companies.

17 Nov 2022 51W-61655-6  
[www.tek.com](http://www.tek.com)

**Tektronix®**

ES France - Département Tests & Mesures - 127 rue de Buzenval BP 26 - 92380 Garches  
 Tél. 01 47 95 99 45 - Fax. 01 47 01 16 22 - e-mail: [tem@es-france.com](mailto:tem@es-france.com) - Site Web: [www.es-france.com](http://www.es-france.com)