



Crimp Tool for RG58, RG7, RG11, RG59, RG6 cables
for use with F, BNC, RCA connectors

Crimp Tools Technical Data Sheet

PE5221

Features

- Available for RG59 and RG6 F/RCA/BNC and RG11 F type compression connector

Configuration

Tool Type
Cable Type

Crimp Tool
RG58, RG7, RG11, RG59, RG6

Mechanical Specifications

Size

Length

6.89 in [175.01 mm]

Width

2.36 in [60 mm]

Height

1.38 in [35.05 mm]

Weight

0.464 lbs [210.47 g]

Compliance Certifications (see [product page](#) for current document)

Plotted and Other Data

Notes:

- Values at +25 °C, sea level

Crimp Tool for RG58, RG7, RG11, RG59, RG6 cables for use with F, BNC, RCA connectors from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: [Crimp Tool for RG58, RG7, RG11, RG59, RG6 cables for use with F, BNC, RCA connectors PE5221](#)


URL: <https://www.pasternack.com/crimp-tool-rg58-rg7-rg11-rg59-rg6-pe5221-p.aspx>

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.



F

A

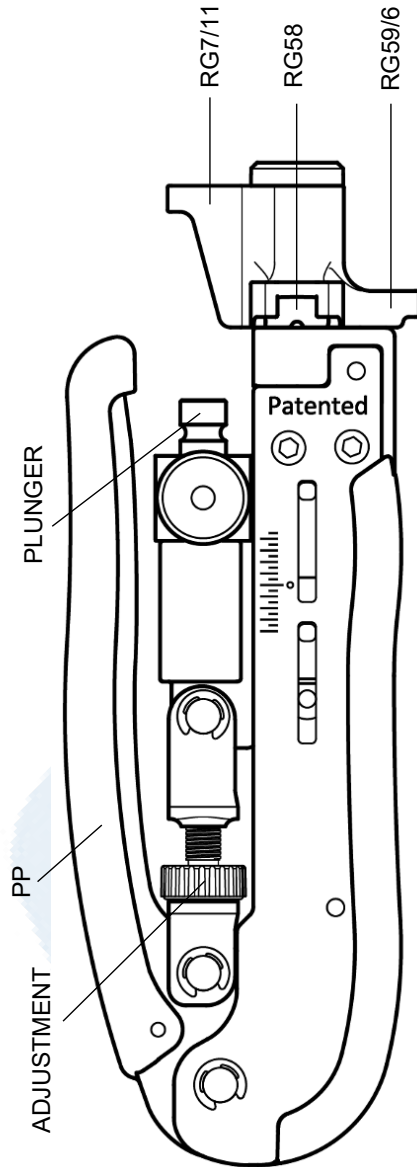

FUNCTION:

- FOR USE WITH RG59 AND RG6 F/RCA/BNC AND RG11 F TYPE COMPRESSION CONNECTORS.

	CRIMPING CABLE SIZE	COMPRESSED DISTANCE
F		11.0-17.7mm
RCA	RG59/6	16.4-23.1mm
BNC		24.3-31.0mm
F		12.5-19.2mm
RCA	RG58	17.8-24.5mm
BNC		25.5-32.2mm
F	RG11	27.9-34.6mm

UNLESS OTHERWISE SPECIFIED
LEADING DIMENSIONS ARE INCHES
DIMENSIONS IN [] ARE MILLIMETERS

TOLERANCES:

X = ±.2 [.5] FRACTIONS
.XX = ±.02 [.5] ± 1/32
.XXX = ±.005 [.13] ANGLES ± 1°

CABLE LENGTH TOLERANCES:

≤12 [305] = +1 [25] / -0
>12 [305] ≤ 60 [1524] = +2 [51] / -0
>60 [1524] ≤ 120 [3048] = +4 [102] / -0
>120 [3048] ≤ 300 [7620] = +6 [152] / -0
>300 [7620] = +5% / -0

ALL DIMENSIONS ARE FOR REFERENCE ONLY
AND SUBJECT TO CHANGE WITHOUT NOTICE

PE PASTERNAK
an INFINITI® brand

Website: www.Pasternack.com
Phone: 1.866.727.8376 | 1.949.261.1920

DESCRIPTION

Tool, F/BNC/RCA, RG58/59/67/11 Multi-Locator, Adjustable Type



INTERPRET ALL DIMENSIONS AND
TOLERANCES PER ASME Y14.5

SCALE

NONE

SHEET

1 OF 1

THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF INFINITE ELECTRONICS, INC. ANY REPRODUCTION IN
ART OR WHOLE WITHOUT THE WRITTEN PERMISSION OF INFINITE ELECTRONICS, INC. IS PROHIBITED.
THESE COMMODITIES, TECHNOLOGY OR SOFTWARE WERE EXPORTED FROM THE UNITED STATES IN ACCORDANCE WITH THE
EXPORT ADMINISTRATION REGULATIONS. DIVERSION CONTRARY TO U.S. LAW PROHIBITED.



ES France - Département RF & Hyperfréquences
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 60
Fax. 01 47 01 16 22



e-mail : hyper@es-france.com
Site Web : www.es-france.com