

SENCITY® Road PUCK Antenna

K7023211

Properties

- Frequency range from 406 to 428 MHz
- Meets EN50155 standard
- ECE-R118 approved
- Single-hole mounting with only 70mm in height



Electrical bands			
	Band 1	Band 2	Band 3
Frequency (MHz)	406 MHz ... 410 MHz	410 MHz ... 425 MHz	425 MHz ... 428 MHz
VSWR	1.9	1.7	1.9
Ambient Temperature	25 °C	25 °C	25 °C

Electrical remarks

Remarks	Indicated VSWR values are valid for a metallic ground plane of 1M x 1M or larger.
---------	---

Ports

Port name	Tetra
Connector	N, jack (female)
Polarization	vertical
DC grounded	Yes

Connections

Port number	
Band 1	✓
Band 2	✓
Band 3	✓



SENCITY® Road PUCK Antenna

K7023211

Mechanical data	
Weight	0.4 kg
Dimensions	70 mm x 110 mm (Height x Diameter)
Remarks	Radiator and base: Aluminum. Radome: High impact plastic. All screws and nuts: Stainless steel. All metal parts of this antenna are DC grounded. Robust and car-wash proof vehicular antenna. Packaging size (outside): 117 x 117 x 114 mm

Material data	
Radome colour	Grey
Back plate/base plate material	Aluminium
Back plate/base plate colour	Black
Housing material and surface treatment	Black

Environmental data	
Operation temperature	-40 °C ... 85°C
Storage temperature	-55 °C ... 85°C
Environment (application)	Outdoor
Ingress protection (IP Rating)	IP56
Flammability rating	ECE-R118

Environmental remarks
ECE-R118 for rooftop installation only.

Additional Information
The drilling diameter is 12 mm except the N connector versions: 17 mm. A special zinc washer ensures a good contact at the edges of the hole.




SENCITY® Road PUCK Antenna

K7023211

Outline drawing

Diese Zeichnung ist unser geistiges Eigentum und darf ohne unsere Einwilligung weder kopiert, reproduziert noch Dritten weitergegeben werden. Jegliche Nachahmung ist ausdrücklich untersagt und wird strafrechtlich verfolgt. This drawing is our intellectual property and must not be used for any other purpose than which it was supplied, or be reproduced without written permission of the authors.

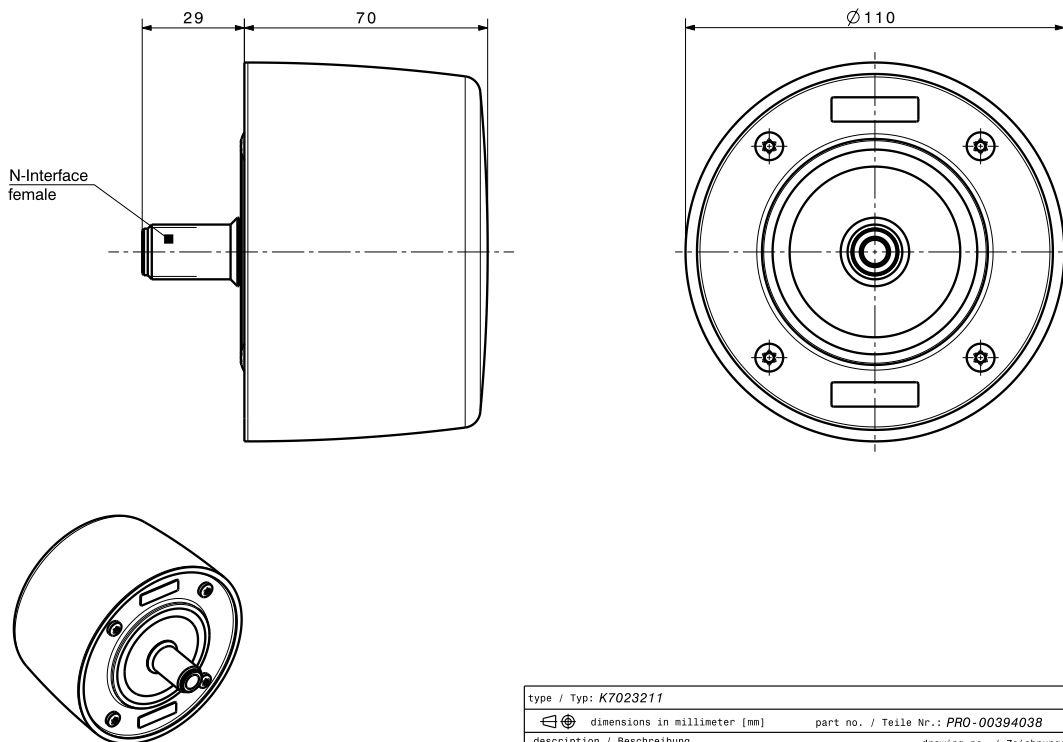

type / Typ: K7023211		
⌀ dimensions in millimeter [mm]	part no. / Teile Nr.: PRO-00394038	A sheet/blatt: XX / XX
description / Beschreibung	drawing-no. / Zeichnungsnr.	Release
Antenna	DOU-00394038	A
alternative ID:		

HUBER+SUHNER is certified by ISO 9001, ISO 14001, ISO 45001, IATF 16949, AS/EN 9100 and ISO/TS 22163-IRIS. Waiver: Facts and figures herein are for information only and do not represent any warranty of any kind.
DOCUMENT PIM-P1028 / Date of publication: 31.10.2023 / uncontrolled copy

HUBER+SUHNER



ES France - Département RF & Hyperfréquences
127 rue de Buzenval BP 26 - 92380 Garches



Tél. 01 47 95 99 60
Fax. 01 47 01 16 22



e-mail : hyper@es-france.com
Site Web : www.es-france.com