

4-Cavity Duplexer for the 160 MHz Band

DESCRIPTION

- The DPF 2/4... is a 4-cavity duplex filter for duplex radiotelephones.
- This duplexer is delivered in a low band version type DPF 2/4 L, tunable within 138 - 156 MHz and a high band version type DPF 2/4 H, tunable within 152 - 175 MHz. These models are again delivered in 3 submodels, each dedicated to work with a certain duplex spacing. See "Ordering information" below.
- The DPF 2/4... models are primarily intended for equipment, where the Tx and Rx operate on single frequencies, but they can also, however with slightly reduced data, be used where the Tx and Rx operate on several channels, i.e. within a certain port bandwidth. In the last case, factory-tuning is recommended.
- The filter has very small physical dimensions owing to the use of high-Q, temperature compensated helical resonators.
- The housing is made of extruded aluminium, the chassis of passivated steel, and teflon insulation has been applied in the rigid coaxial cables and in the connectors.
- The filter is coated with black vinyl to prevent corrosion.



SPECIFICATIONS

Electrical		
Model	DPF 2/4...	
Frequency	DPF 2/4 L : 138 - 156 MHz DPF 2/4 H : 152 - 175 MHz	
Max. Input Power	50 W	
Special spec. info	Single-channel tuned :	Multi-channel tuned :
Insertion Loss Tx-Ant and Ant-Rx	(at 4.5 MHz duplex spacing) < 1.0 dB (typ. 0.8 dB)	1.5 MHz BW : < 1.2 dB (typ. 1.0 dB)
Tx Noise Suppression on Rx Frequency	> 60 dB	1.5 MHz BW : > 40 dB
Isolation Rx on Frequency Tx	> 60 dB	1 MHz BW : > 40 dB
Impedance	50 Ω	
Duplex Spacing	4 - 10 MHz (see ordering)	
VSWR	< 1.5:1	
Mechanical		
Connection(s)	N(f) (BNC(f), TNC(f), UHF(f) or SMA(f) on request)	
Dimensions	196 (excl. conn.) x 104 x 33 mm / 7.72 (excl. conn.) x 4.09 x 1.30 in.	
Weight	Approx. 0.67 kg / 1.48 lb.	
Environmental		
Operating temperature range	-30 °C to +60 °C	
Frequency Stability	Approx. 5 ppm / °C	

ORDERING


Model	Product No.	Description	Frequency
DPF 2/4 L-4/6-N(f)	200000066	SPACING: 4 - 6 MHz	138 - 156 MHz
DPF 2/4 L-6/8-N(f)	200002661	SPACING: 6 - 8 MHz	138 - 156 MHz
DPF 2/4 L-8/10-N(f)	200000071	SPACING: 8 - 10 MHz	138 - 156 MHz
DPF 2/4 H-4/6-N(f)	200000057	SPACING: 4 - 6 MHz	152 - 175 MHz
DPF 2/4 H-6/8-N(f)	200002662	SPACING: 6 - 8 MHz	152 - 175 MHz
DPF 2/4 H-8/10-N(f)	200000064	SPACING: 8 - 10 MHz	152 - 175 MHz



ORDERING INFORMATION

When ordering, please use the table above to select the appropriate ordering designation for the desired filter type. If duplex Tx and Rx frequencies are stated when ordering, the duplexers are delivered factory adjusted. If Tx and Rx frequencies are not stated, the filters are delivered nonadjusted.


TYPICAL RESPONSE CURVE

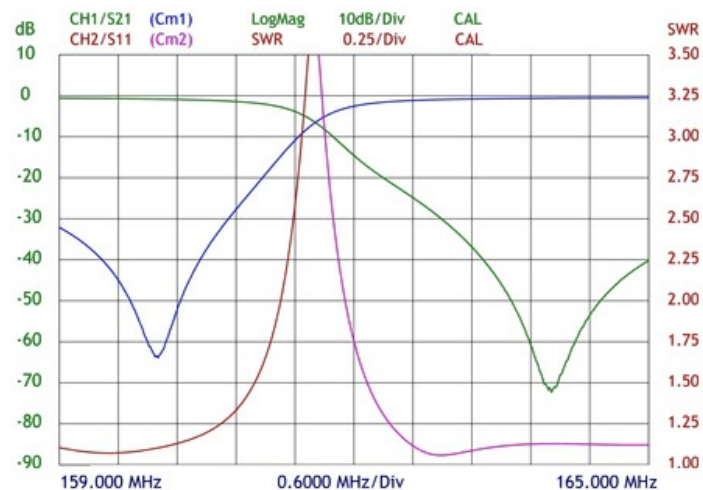

PLEASE NOTE

Special configurations of this filter type may be quoted on request. For instance, the filter can be delivered with other connector types or with flying leads (RG 316 coaxial cable) terminated with connectors or for soldering-connection.

MOUNTING DETAILS

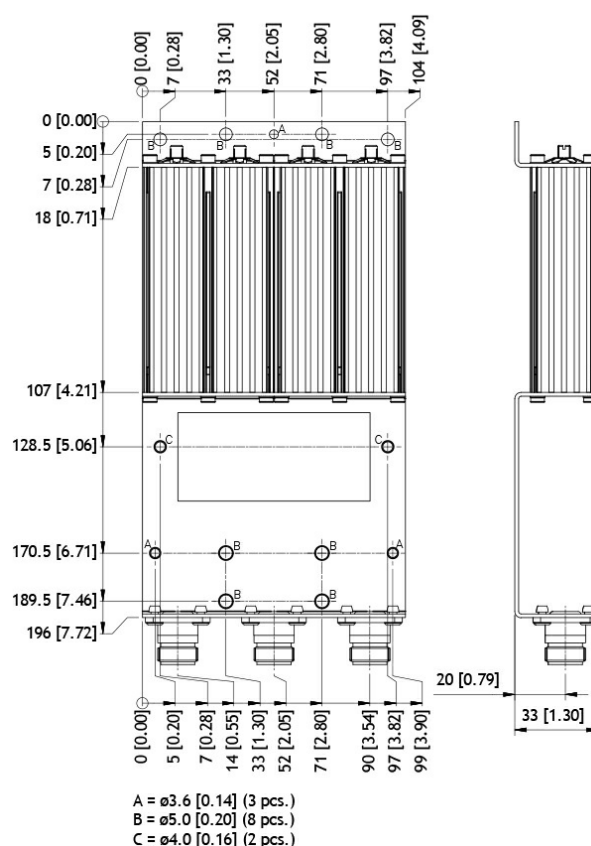

All dimensions are given in mm [in.]

