



SUNPOWER TECHNOLOGY CORP.  
 16F-1, No.150, Jian Yi Rd., Chung Ho City, Taipei Hsien, Taiwan, R.O.C.  
 TEL: 886-2-8226-3100 FAX: 886-2-8226-3111  
 http://www.sunpower.com.tw  
 E-mail: sunpower@sunpower.com.tw

# SPW-6200P1

Active P.F.C Function

200W, Six Output

For Industrial ATX 1U System



83 x 250 x 40.5 mm  
 3.3 x 9.9 x 1.6 inch



## Features:

- \* Universal full range AC input with active PFC, P.F.> 0.95
- \* +3.3V, +5V main output remote sensing
- \* Over load, over voltage & short circuit protection
- \* Built-in long life ball bearing fan
- \* 100% 50°C burn-in test
- \* Meet Intel ATX 2.01 / ATX2.03 / ATX 12V / EPS
- \* UL, cUL, TUV, ,CB, CE certified
- \* 1 years warranty

## Specification:



		V1	V2	V3	V4	V5	V6
OUTPUT	Voltage	+3.3V	+5V	+12V	-5V	-12V	+5Vsb
	Min. Load	0A	0.5A		0A		
	Max. Load	15A	25A	13A	0.5A	1A	2A
	Regulation	±5%	+5/-4%		±5%		+8/-5%
	Ripple Noise(max)	50mV		120mV	50mV	120mV	50mV
	Efficiency (typ)	70%					
	Max Power	+3.3V & +5V max 130W, total output max 200W,					
INPUT	Voltage	90V ~ 264V universal full range, single phase					
	Frequency	47 ----- 63 Hz					
	Current	<3.0A @ 100V AC input, full load condition					
	Inrush Current	<40A@115V / <80A@230V AC input, full load condition. Cold start at 25°C ambient					
	Leakage Current	<1.5mA@264V AC input					
	Power Factor	Meet IEC 1000-3-2 class D, P.F.>0.95					
PROTECTION	Over Load Protection	Over 105% ~ 180% of rating, shutdown					
	Over Voltage Protection	+3.3V: +3.8V~+4.6V, +5V: +5.8V~+7.0V, +12V: +13.8V~+17.5V					
	Short Circuit Protection	Shutdown					
OTHERS	Setup time	-----					
	Rise time	<30mS					
	Hold up time	>20mS@230V					
	TTL Signal	Power Good Signal, PS-ON Signal					
	Cooling	One 10CFM (min.) DC ball bearing Fan					
Environment	Temperature	Operating: 0~70°C; derating: 45°C ~70°C : 2.5%/°C. Storage: -10~+75°C					
	Humidity	Operating: 20% ~ 85%; Storage: 10% ~ 95% (non condensing)					
M.T.B.F.		120K hours					
SAFETY		UL 60950, CSA C22.2 No.60950, TUV EN 60950, IEC 60950, EMKO-TSE (74-SEC)207/94 Certified					
EMC	EMI	FCC CFR 47 PART 15 CLASS B, EN 50081-1, CNS 13438 CALSS B.					
	EMS	EN 50082-1 (1997)					



SUNPOWER TECHNOLOGY CORP.  
 16F-1, No.150, Jian Yi Rd., Chung Ho City, Taipei Hsien, Taiwan, R.O.C.  
 TEL: 886-2-8226-3100 FAX: 886-2-8226-3111  
 http://www.sunpower.com.tw  
 E-mail: sunpower@sunpower.com.tw

Dimension:

# SPW-6200P1

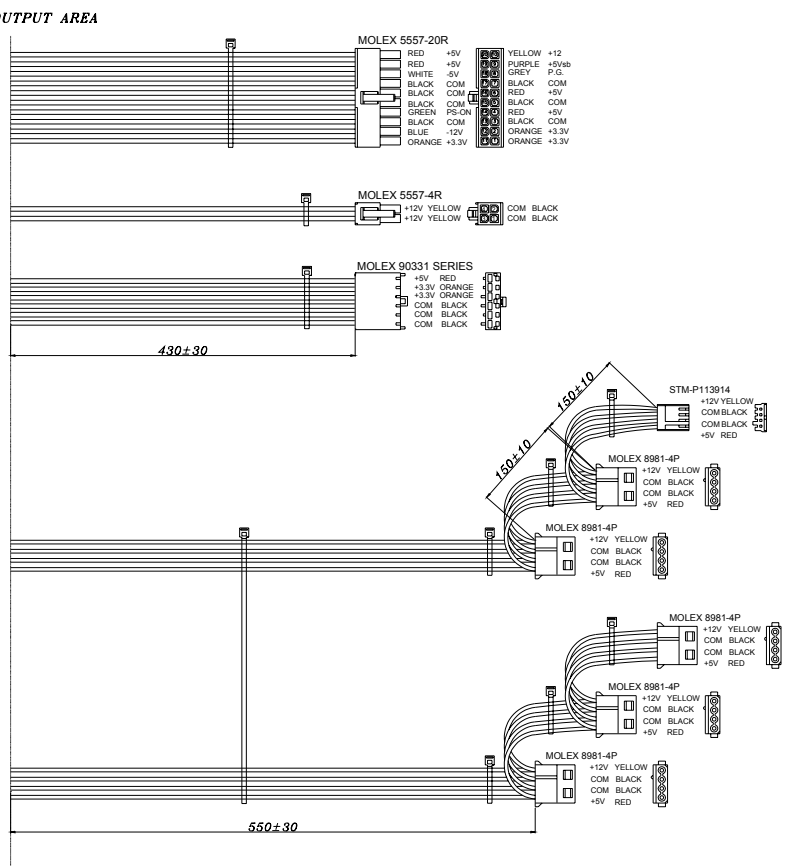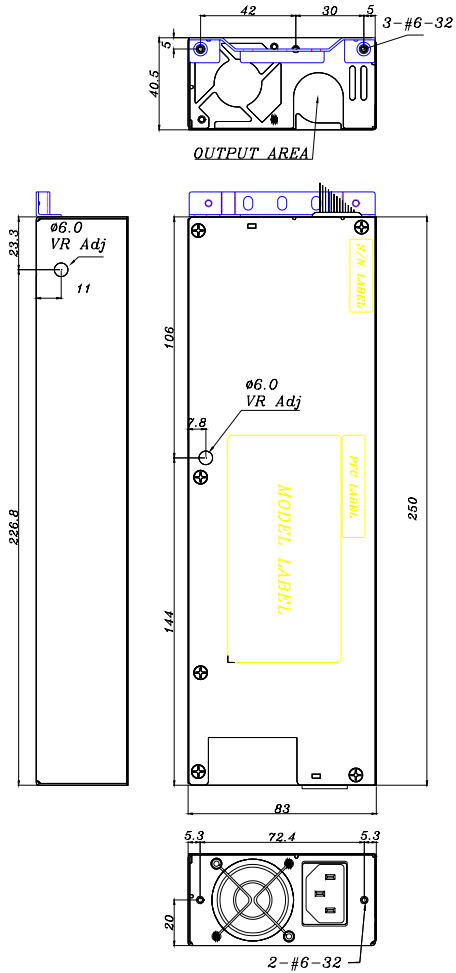

NOTES :  
 1. CHASSIS MATERIAL : S.P.C.C. & NICKEL PLATED.  
 2. NUT : mm