



SLO 4215

42" Wide Open Frame LCD Display, 1000nits, WXGA

SLO 4215 wide open frame LCD display, built-in 1000 nits high brightness for sunlight readable application. Features wide operating temperature, high brightness, AOT optical bonding, touch screen capable, and customized mechanical design; fulfill the demand for extreme environments. It offers the best visibility, performance and cost effective value. The high level of brightness together with fast response time and backlight technology, the monitor brings remarkable display quality. And guaranteeing product life cycle longevity, stability, and reliability. Perfectly suitable for kiosk, ATM, POS, marine, military, medical, transportation, and outdoor industrial application.

Key Features

- Sunlight Readable
- Wide Viewing Angle
- High Contrast Ratio
- Long Lamp Life
- Fast Response Time
- Thin and Light

Applications

Marine, Military,
Medical, Transportation
Industrial



Specifications

V1

Model No.	SLO4215
Description	42" Wide Open Frame LCD Display, 1000 nits, WXGA
Display Area (mm)	930.25 x 530.01mm
Brightness	1000 cd/m ²
Resolution	1366x768 (WXGA)
Contrast Ratio	1500 : 1
Pixel Pitch (mm)	0.681(H) x 0.681 (V)
Viewing Angle	+89°~-89°(H), +89°~-89°(V)
Display Colors	16.7M
Response Time (Typical)	20ms
Power Input	AC 100V ~ 240V
Power Consumption	245W
Dimensions (mm)	1007x558.6x86.6
Weight (Net)	32Kg
Control Board (Optional)	☐ AD5621GA ☐ AD5621GD ☐ AD5766GDVA ☐ AD2662GDVAR
☐ AD5621GA	VGA+Audio
☐ AD5621GD	VGA+DVI
☐ AD5766GDVA	VGA+CVBS+S-Video+Audio (Optional DVI / Component)
☐ AD2662GDVAR	VGA+DVI (Optional S-Video/ Component / Audio)
F / R Control Button	☐ 5 Key ☐ 4 Key
☐ 5 Key	Power Switch, Menu, Select (+, -), Auto
☐ 4 Key	Power Switch, Menu, Select (+, -),
OSD Menu	Brightness, Contrast, H/V Position, Color, Phase, Clock...
Optional	☐ AOT ☐ Touch Screen ☐ Waterproof

Specifications are subject to change without notice.


All brands or product names are trademarks or registered trademarks of their respective companies.



Mechanical Drawing

Outline Dimensions

Unit:mm

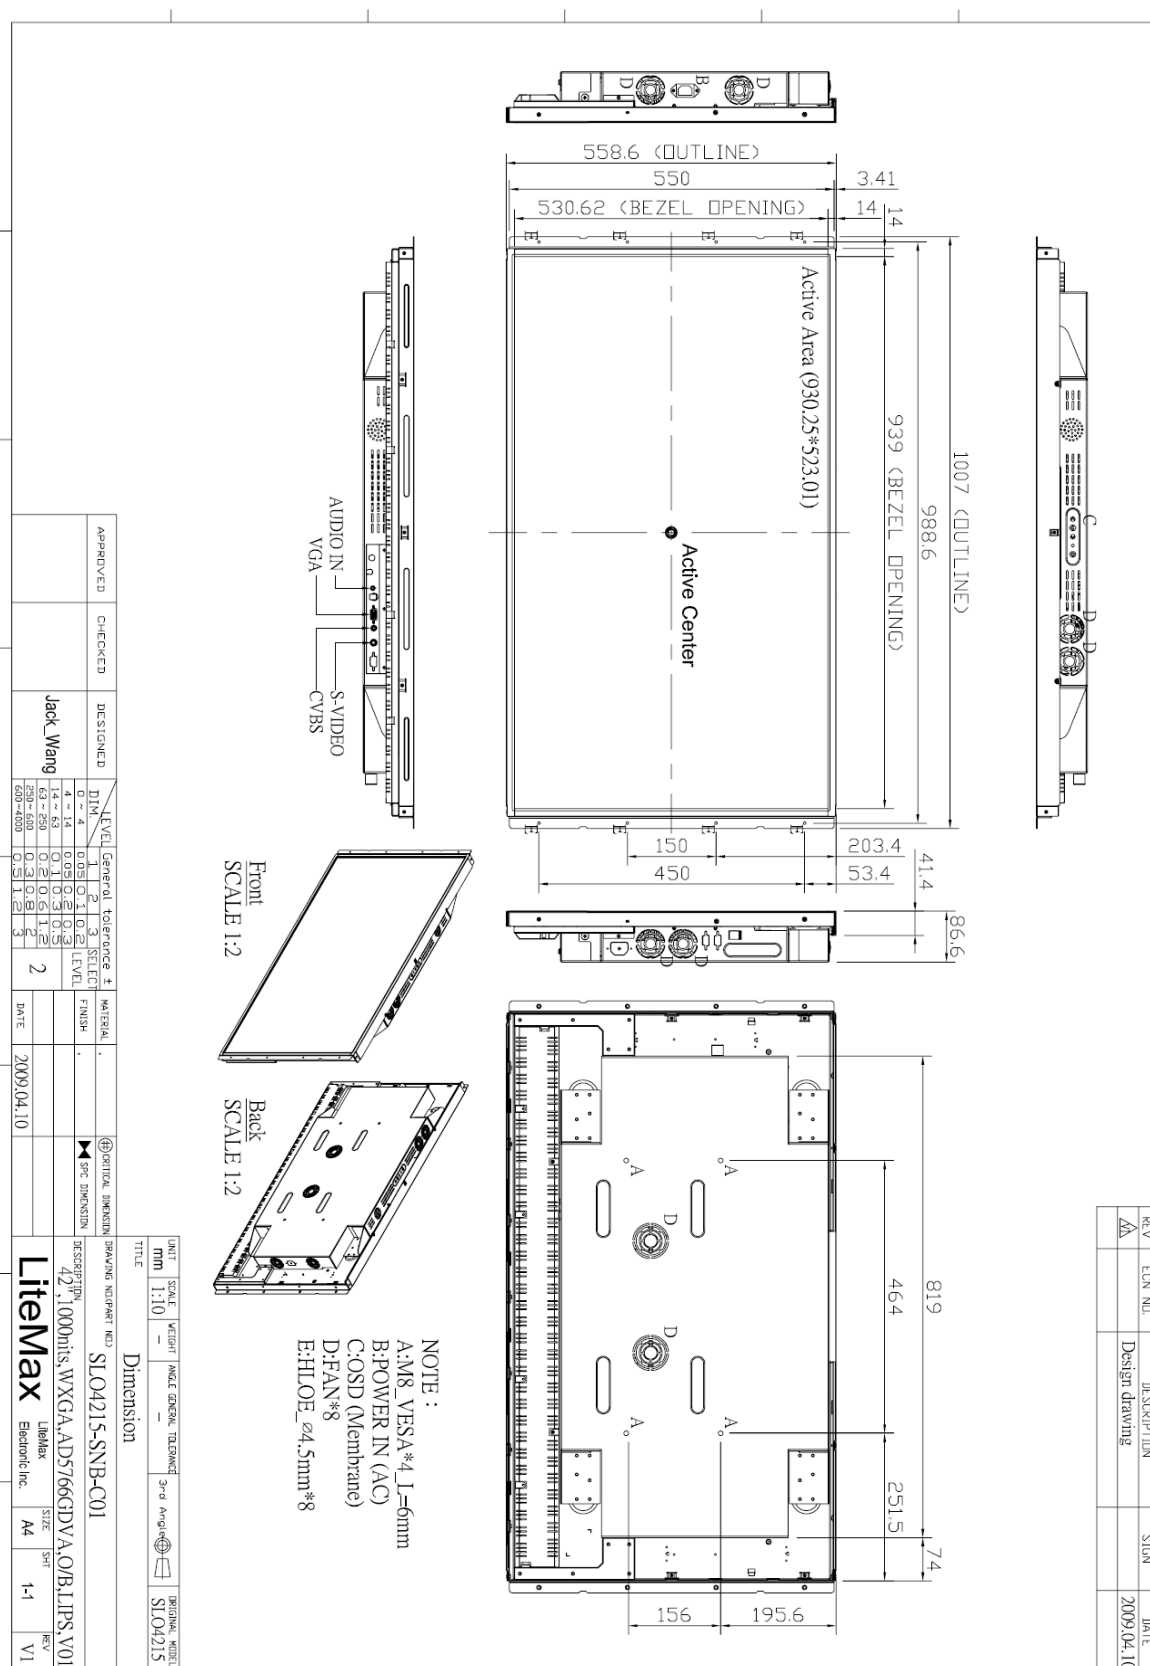



Ordering Information

Model Name	Description
SLD3245-ENB-G01	32", 1000nits, WXGA, LID29A01, AD2662GD, DPS-210, O/B, V01
SLO3245-ENB-G01	32", 1000nits, WXGA, LID29A01, AD2662GD, DPS-210, O/B, V01

Optional Accessories

Part Number	Description
810618301010	CABLE.POWER.AC.1830mm USA type
810618301090	CABLE,POWER,AC,1830mm Europe type
810618301050	CABLE.POWER.AC.1830mm UK type
810618301170	CABLE.POWER,AC,1830mm Australia type
810618301030	CABLE.POWER.AC.1830mm Japan type