

HORUS420

2U 19" RUGGED RACKMOUNT
WITH INTEL® 6TH GEN CORE I7 PROCESSOR,
MXM GRAPHIC CARD, INTEL X540 10 GbE,
OPERATING TEMPERATURE -40~+50°C



- INTEL® 6TH GEN. CORE I7-6700
- 4 x DDR4 XR-DIMM UP TO 64GB
- INTEL® X540-T2 DUAL 10GbE
- MXM GRAPHIC CARD SUPPORT
- 6 x RJ45 LAN, 6 x USB
- 2 x 2.5" EASY SWAP SSD/HDD TRAY
- EXTENDED TEMPERATURE -40~+50°C

SPECIFICATIONS

SYSTEM	
CPU Type	Intel® Skylake-S Desktop Processor
Memory Type	4 x DDR4 XR-DIMM up to 64GB
Expansion slot	4 x mPCIe slot (two supported with mSATA)
Storage Device	2 x 2.5" Easy swap HDD/SSD Tray
FRONT I/O INTERFACE	
USB	2 x USB 2.0
2.5" SSD/HDD Tray	2
Power button/ Power LED	1
HDD LED	1
REAR I/O INTERFACE	
USB	4 x USB 3.0
10 Gigabit Ethernet	2 x RJ45 (Optional)
1 Gigabit Ethernet	4 x RJ45
Display	1 x DisplayPort and 1 x HDMI from CPU DisplayPort from MXM Graphic card up to 6
MECHANICAL AND ENVIRONMENT	
Power Requirement	2 x 12V DC-in (others by request)
Weight	9.7 kg (21.4 lbs)
Operating Temperature	-40 to 50°C with 1.2m/s airflow
Storage Temperature	-40 to 85°C
Relative Humidity	5% to 95%, non-condensing

ORDERING INFORMATION

HORUS420-950

2U 19" RUGGED RACKMOUNT

**WITH INTEL® 6TH GEN CORE I7-6700, NVIDIA GTX950M,
OPERATING TEMPERATURE -40~+70°C**

HORUS420-950-10GbE

2U 19" RUGGED RACKMOUNT


**WITH INTEL® 6TH GEN CORE I7-6700, NVIDIA GTX950M,
DUAL 10GbE, OPERATING TEMPERATURE -40~+50°C**

HORUS420-1060-10GbE

2U 19" RUGGED RACKMOUNT

**WITH INTEL® 6TH GEN CORE I7-6700, NVIDIA GTX1060M,
DUAL 10GbE, OPERATING TEMPERATURE -40~+50°C**

DIMENSION

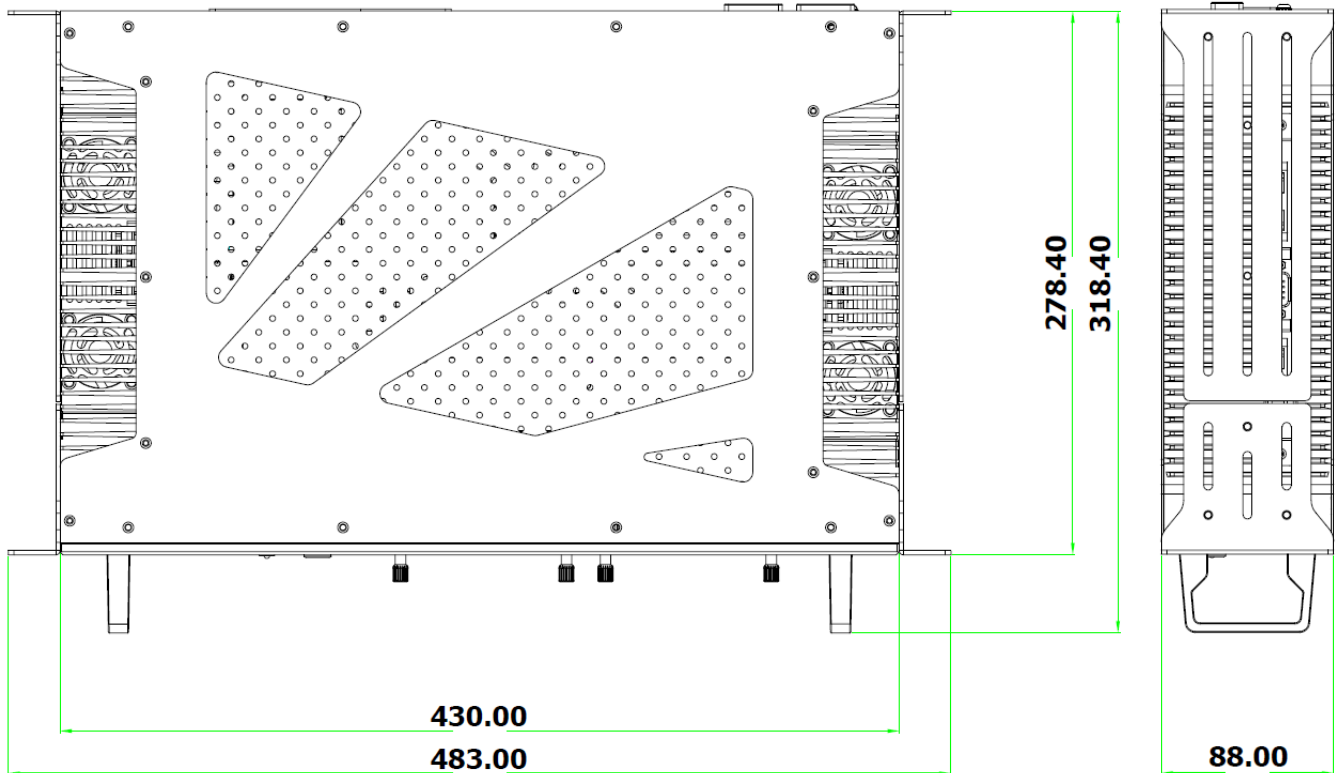

I/O APPEARANCE

